
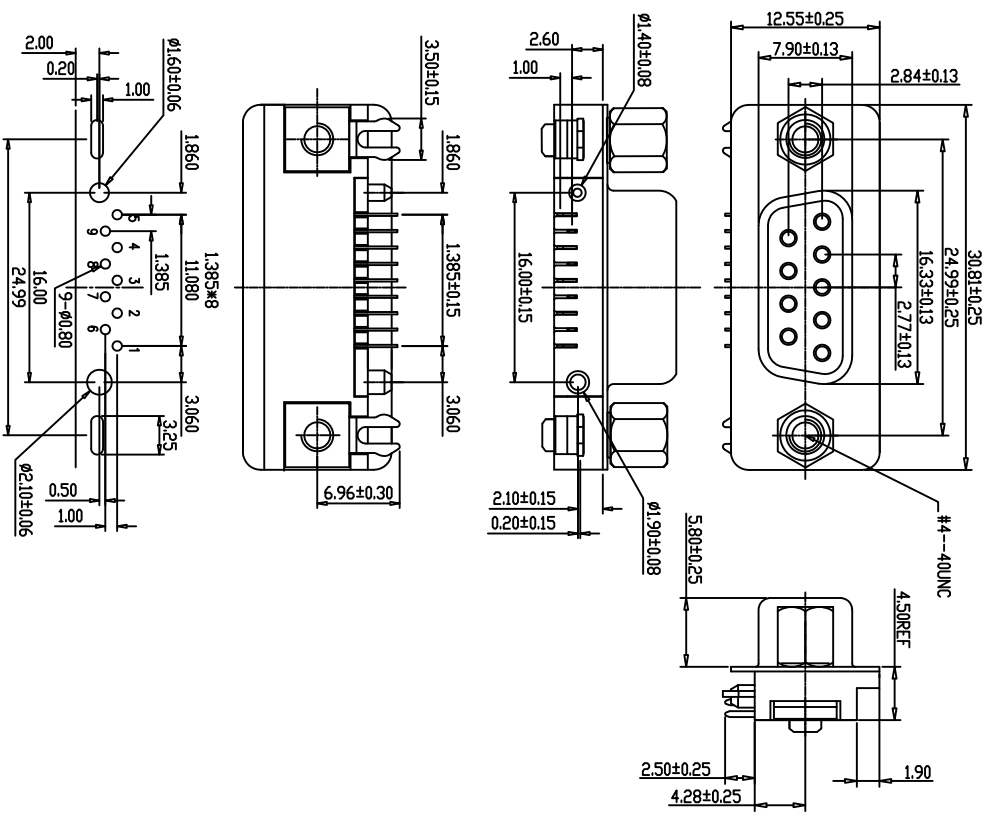


ROHS

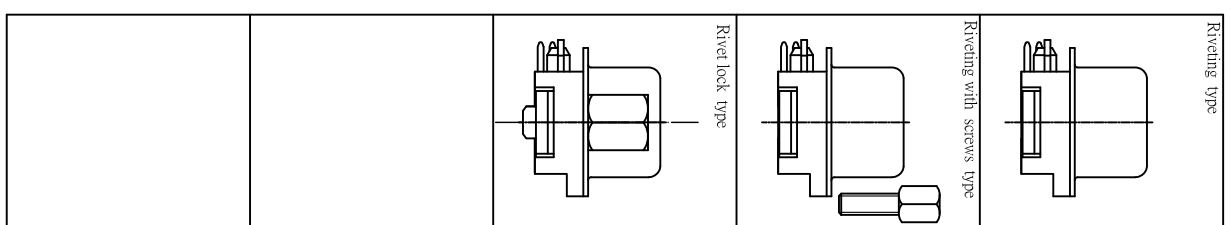

RECOMMENDED P.C.B. LAYOUT

SPECIFICATIONS:
ELECTRICAL SPECIFICATION
 Contact Current Rating: 5 Amperes
 Dielectric Withstanding Voltage: AC 1000/60ses.r.m.s.
 Insulation Resistance: 5000 Megohm Min. at DC 500V
 Contact Resistance: 25 milliohm Max.
 Operating Temperature: -55°c_+105°c

MATERIALS:
 Contacts: Brass
 Insulator: PBT+G.F U194V-0
 Shell: Steel

PART NO:
 ZDS H09E E1 BQ N 30
 2 3 4 5 6 7 8 9 10

- D-SUB P.C.B SLIM 9PIN Male Dial Row Right Angle Type(Stamped PIN)
- board lock material:
H: Brass
- Contact No.:
09=09PIN
- Contact Type:
F=Femate type:Brass (stamped PIN)
- Contact plating:
See table 1
- Assembly:
B=Riveting type
- Accessories:
0 : No accessories
A: With iron hexagon screw, 4.8*11.8mm
B: With brass hexagon screw, 4.8*11.8mm
E : Lock brass hexagon screw, 5.8*12.8mm
G: Lock iron hexagon screw, 4.8*11.8mm
J : Lock iron hexagon screw, 5.8*12.8mm
K : Lock brass hexagon screw, 4.8*11.8mm
- Shell material and Plating:
N=SPCC, Plating nickel
T=SPCC, Plating Tin
- Color:
1=White
2=Blue
3=Black
- Remark:

Table 1

CODE	Gold Plated	Other Area	CODE	Selective Gold Type
C1	Contact Area	Gold Flash	E1	Contact Area
C2	Gold Flash	Gold Flash	E2	Gold Flash
C3	Gold 3u"	Gold Flash	E3	Gold 3u"
C4	Gold 10u"	Gold Flash	E4	Gold 10u"
C5	Gold 15u"	Gold Flash	E5	Gold 15u"
	Gold 30u"	Gold Flash		Gold 30u"

unless otherwise specified tolerance:

.X±.38
 .M±.25
 .XX±.15

DSND	HWANGLM	DATE	2011-12-01	SCALE:		NAME:	D-SUB P.C.B SLIM 9PIN Female Dial Row
CHKD				VIEW:			Right Angle Type(Stamped PIN)
APPD				UNIT:	mm		

Dongguan Fishu Electronic Technology Co., Ltd
 Tel:0755-81765247/41 Fax:0769-81765203

Part No: ZDS xxx F x x x x x x x
 Customer Part No.(DWG NO)

MARK	DESCRIPTION	DATE	REVISED	APPROVED
	REVISIONS			