RoHS

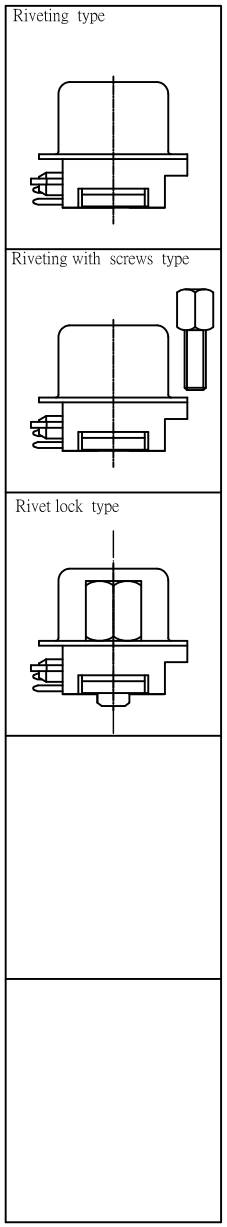

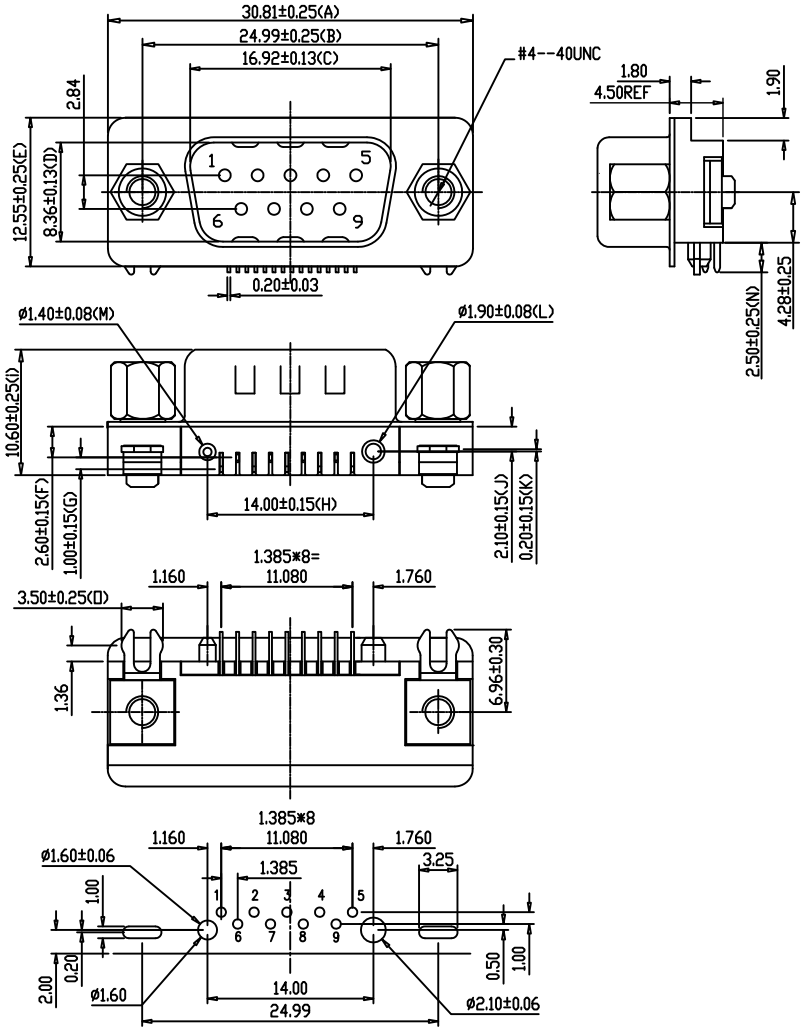

SPECIFICATIONS:

ELECTRICAL SPECIFICATION

Contact Current Rating: 5 Amperes
Dielectric Withstanding Voltage:AC 1000/60ses.r.m.s.
Insulation Resistance: 5000 Megohm Min. at DC 500V
Contact Resistance:25 milliohm Max.
Operating Tempetatute:-55°c__+105°c

MATERIALS:

Contacts:Brass
Contacts: See number description
Insulator:PBT+G.F UL94V-0
Shell:Steel

PART NO:

ZDS H09M E 1 BG N 3 0
1 2 3 4 5 6 7 8 9 10

1, D-SUB P.C.B SLIM 9PIN Male Dual Row Right Angle Type(Stamed PIN)
2, board lock material:
H: Brass
3, Contact No. :
09=09PIN
4, Contact Type:
F=Female type,Brass (stanped PIN)
5, Contact plating：
See table 1
6, Assembly：
B=Riveting type
7，Accessories：
0：No accessories
A:With iron hexagon screw,4.8*11.8mm
B: With brass hexagon screw,4.8*11.8mm
E：Lock brass hexagon screw,5.8*12.8mm
G: Lock iron hexagon screw,4.8*11.8mm
J：Lock iron hexagon screw,5.8*12.8mm
K：Lock brass hexagon screw,4.8*11.8mm
8，Shell material and Plating:
N=SPCC,Plating nickel
T=SPCC,Plating Tin
9，Color :
1=White
2=Blue
3=Black
10，Remark:

Table 1

Gold Plated			Selective Gold Type		
CODE	Contact Area	Other Area	CODE	Contact Area	Other Area
C1	Gold Flash	Gold Flash	E1	Gold Flash	Tin plated
C2	Gold 3u"	Gold Flash	E2	Gold 3u"	Tin plated
C3	Gold 10u"	Gold Flash	E3	Gold 10u"	Tin plated
C4	Gold 15u"	Gold Flash	E4	Gold 15u"	Tin plated
C5	Gold 30u"	Gold Flash	E5	Gold 30u"	Tin plated

MARK	DESCRIPTION	DATE	REVISED	APPROVED
	REVISIONS			

unless otherwise specified tolerance:
.X±.38, ANG±2°
.XX±.25,
.XXX±.15,

DSND	HUANG.J.M	DATE	2011-12-01	SCALE:	NAME: D-SUB P.C.B SLIM 9PIN Male Dual Row Right Angle Type(Stamed PIN)
CHKD				VIEW:	
APVD				UNIT: mm	Part No: ZDS xxx M x x x x x x x

FSCONN
Dongguan Fushu Electronic Technology Co.,Ltd
Tel:0755-81765247/41 Fax:0769-81765203

Customer Part NO:(DWG NO.)