

RoHS


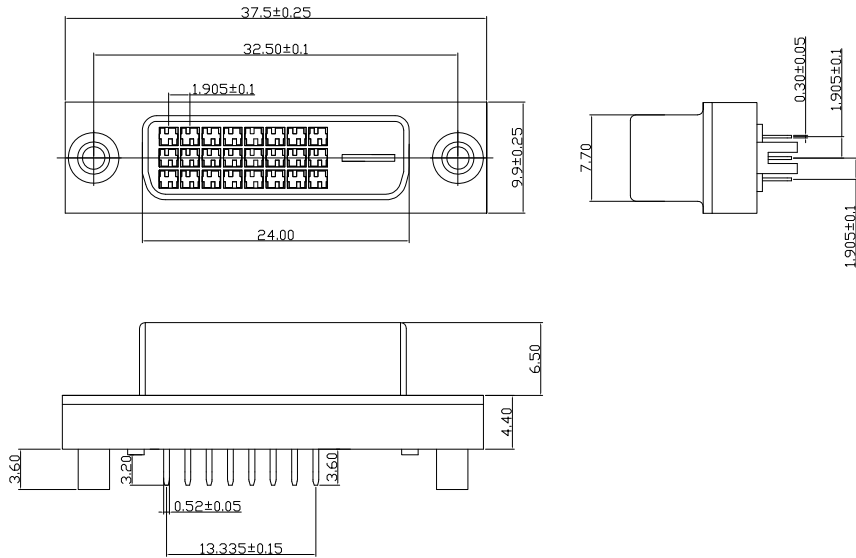
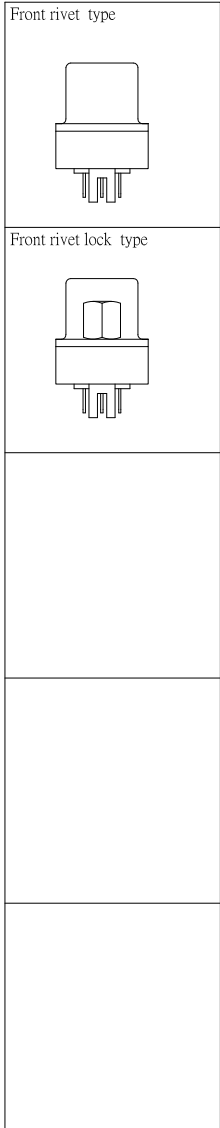


Table 3

Selective Gold Type		
CODE	Contact Area	Other Area
E1	Gold Flash	Tin plated
E2	Gold 3u"	Tin plated
E3	Gold 10u"	Tin plated
E4	Gold 15u"	Tin plated
E5	Gold 30u"	Tin plated

SPECIFICATIONS:
ELECTRICAL SPECIFICATION

Contact Current Rating: 1.5 Amperes
 Dielectric Withstanding Voltage: AC 500/60ses.r.m.s.
 Insulation Resistance: 1000 Megohm Min. at DC 500V
 Contact Resistance: 30 milliohm Max.
 Operating Tempetature: -55°c ~ +85°c

MATERIALS:

Contacts: Brass or Phosphor bronze
 Insulator: PBT+G.F UL94V-0
 Shell: Steel

PART NO:

ZVP C24 F E 1 B 0 N 1 0
 1 2 3 4 5 6 7 8 9 10

- | | |
|---|--|
| <p>1, DVI Female straight Type(Stamed PIN)
 2, Dimension:
 C:5.0 mm
 3, Contact No. :
 18=(18+0)PIN 24=(24+0)PIN
 29=(24+5)PIN
 4, Contact Type:
 F=Female type (stamped PIN)
 5, Contact plating :
 See table 3
 6, Assembly :
 B: Front rivet type</p> | <p>7, Accessories :
 0 : No accessories
 E : Lock brass hexagon screw,5.8*12.8mm
 G: Lock iron hexagon screw , 4.8*12.8
 H : Lock iron hexagon screw , 4.8*9.6mm
 J : Lock iron hexagon screw , 5.8*12.8mm
 K : Lock brass hexagon screw,4.8*11.8mm
 8, Shell material and Plating:
 N=SPCC,Plating nickel
 9, Color :
 1=White
 10, Remark:</p> |
|---|--|

DSND	HUANG.J.M	DATE	2011-12-01	SCALE:		NAME:	DVI 24+0, Female straight ,5.0mm Tyoe(Stamed PIN)
CHKD				VIEW:		Part No:	ZVP-CXXFXXBXXXX
APVD				UNIT:	mm	Customer Part NO:(DWG NO.)	

unless otherwise specified tolerance:

. X ± . 38,
 . XX ± . 25,
 . XXX ± . 15,

ANG ± 2°



Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0769-81765203

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				