



RoHS

Rivet type



Rivet lock type



Riveting with screws type

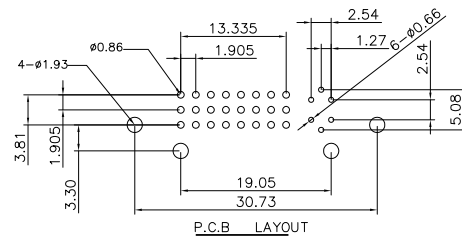
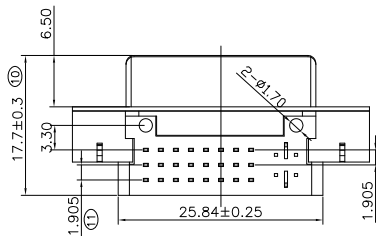
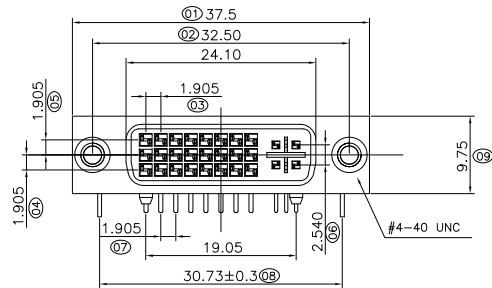



Table 1

Selective Gold Type		
CODE	Contact Area	Other Area
E1	Gold Flash	Tin plated
E2	Gold 3u"	Tin plated
E3	Gold 10u"	Tin plated
E4	Gold 15u"	Tin plated
E5	Gold 30u"	Tin plated

SPECIFICATIONS:

ELECTRICAL SPECIFICATION

Contact Current Rating: 1.5 Amperes

Dielectric Withstanding Voltage: AC 500/60ses.r.m.s.

Insulation Resistance: 1000 Megohm Min. at DC 500V

Contact Resistance: 30 milliohm Max.

Operating Tempetature: -55°c ~ +85°c

MATERIALS:

Simulation Contacts: Phosphor bronze

Digital Contacts: Brass

Insulator: PBT+G.F UL94V-0

Rivet: Brass

Board lock : iron

Shell: Steel

PART NO:

ZVR A29 F E 1 B J N 1 0
1 2 3 4 5 6 7 8 9 10

- | | |
|---|--|
| 1, DVI Female R/A Type(Stamed PIN) | 7, Accessories : |
| 2, Board lock material:
A: iron | 0 : No accessories |
| 3, Contact No. :
29=(24+5)PIN | E : Lock brass hexagon screw, 5.8*12.8mm |
| 4, Contact Type:
F=Female type (stamped PIN) | G: Lock iron hexagon screw , 4.8*12.8 |
| 5, Contact plating :
See table 1 | H : Lock iron hexagon screw , 4.8*9.6mm |
| 6, Assembly :
B: Front rivet type | J : Lock iron hexagon screw , 5.8*12.8mm |
| | K : Lock brass hexagon screw, 4.8*11.8mm |
| | 8, Shell material and Plating:
N=SPCC, Plating nickel |
| | 9, Color :
1=White |
| | 10, Remark: |

DSND	HUANG.J.M	DATE	2011-12-01	SCALE:	NAME:
CHKD				VIEW:	DVI 24+5, Female R/A Tyoe(Stamed PIN)
APVD				UNIT: mm	Part No: ZVR-AXXFXBXXXX
				Customer Part NO:(DWG NO.)	
				Dongguan Fushu Electronic Technology Co.,Ltd	
				Tel:0755-81765247/41 Fax:0769-81765203	

unless otherwise specified tolerance:

. X±. 38,
. XX±. 25,
. XXX±. 15,

ANG±2°

MARK

DESCRIPTION

DATE

REVISED

APPROVED

REVISIONS