

RoHS


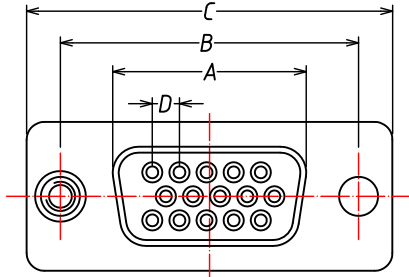
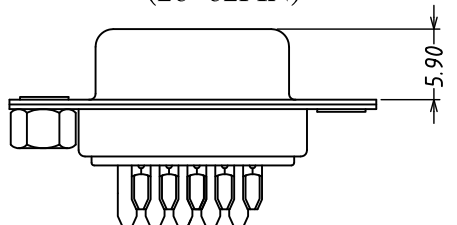
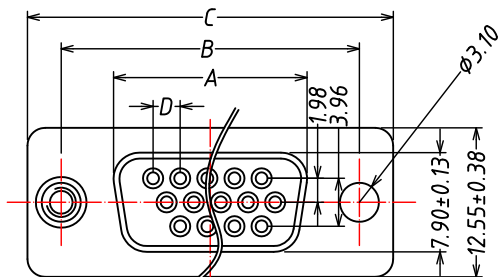







Table 1

CODE	H
D	3.00
E	3.00
K	4.00
N	6.30
A	5.80

Table 2

NUMBER OF CONTACTS	A	B	C	D
15	16.33	24.99	30.85	2.29
26	24.66	33.32	39.14	2.29
44	38.38	47.04	53.04	2.29
62	54.84	63.50	69.32	2.41

Table 2

Gold Plated			Selective Gold Type		
CODE	Contact Area	Other Area	CODE	Contact Area	Other Area
C1	Gold Flash	Gold Flash	E1	Gold Flash	Tin plated
C2	Gold 3u"	Gold Flash	E2	Gold 3u"	Tin plated
C3	Gold 10u"	Gold Flash	E3	Gold 10u"	Tin plated
C4	Gold 15u"	Gold Flash	E4	Gold 15u"	Tin plated
C5	Gold 30u"	Gold Flash	E5	Gold 30u"	Tin plated

SPECIFICATIONS:

ELECTRICAL SPECIFICATION

Contact Current Rating: 3 Amperes
Dielectric Withstanding Voltage:AC 1000/60ses.r.m.s.
Insulation Resistance: 5000 Megohm Min. at DC 500V
Contact Resistance:25 milliohm Max.
Operating Tempetature:-55°c ~ +105°c

MATERIALS:

Contacts:Brass or Phosphor bronze
Contacts: See number description
Insulator:PBT+G.F UL94V-0
Shell:Steel or Stainless steel

PART NO:

ZHB 015 F E 1 D O N 3 0
1 2 3 4 5 6 7 8 9 10

- D-SUB Female Three Row solder Type(Stamed PIN)
- Board lock material:
N/A
- Contact No. :
09=9PIN 15=15PIN
25=25PIN 37=37PIN
- Contact Type:
F=Female type,Brass (stamped PIN)
- Contact plating :
See table 3
- Assembly :
A=Rear rivet hole hexagon nut,5.8mm
B=No accessories
C=Front rivet no hole hexagon nut,5.8mm
D=Rear rivet hole hexagon nut,3.0mm
K=Rear rivet hole hexagon nut,4.0mm
L=Rear rivet hole hexagon nut,6.5mm
N=Rear rivet hole hexagon nut,6.3mm
- Accessories :
O : No accessories
E : Lock brass hexagon screw,5.8*12.8mm
G: Lock iron hexagon screw , 4.8*12.8
H : Lock iron hexagon screw , 4.8*9.6mm
J : Lock iron hexagon screw , 5.8*12.8mm
K : Lock brass hexagon screw,4.8*11.8mm
- Shell material and Plating:
N=SPCC,Plating nickel
A=SPCC,Front shell plating nickel and rear shell tin
D= Stainless steel,Passivation
C=Stainless steel, Plating nickel
T=SPCC,Plating Tin
- Color :
1=White
2=Blue
3=Black
- Remark:

DSND	HUANG,JM	DATE	2011-12-01	SCALE:	NAME:
CHKD				VIEW:	D-SUB Female Three Row solder Type(Stamed PIN)
APVD				UNIT: mm	Part No: ZHB0XXFXXXXXX
Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203				Customer Part NO:(DWG NO.)	

unless otherwise specified tolerance:
. X±. 38,
. XX±. 25,
. XXX±. 15,

ANG ±2°

MARK DESCRIPTION DATE REVISED APPROVED

REVISIONS