



RoHS


No accessories




Front rivet no hole nut type





Rear hole rivet nut type



Front hole rivet nut type





hole rivet nut type front lock screw

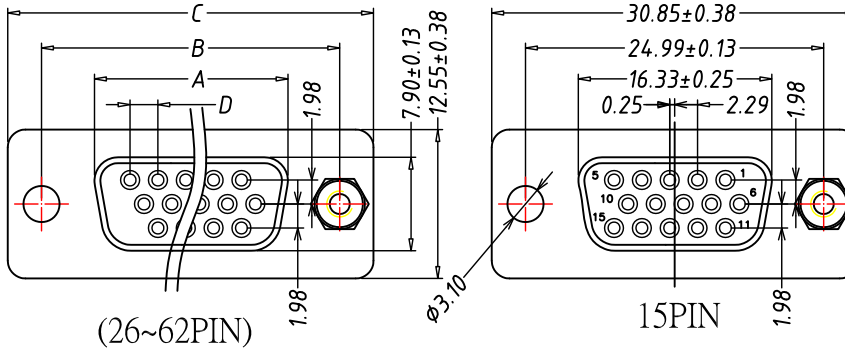


(26~62PIN)

15PIN

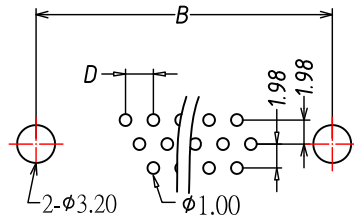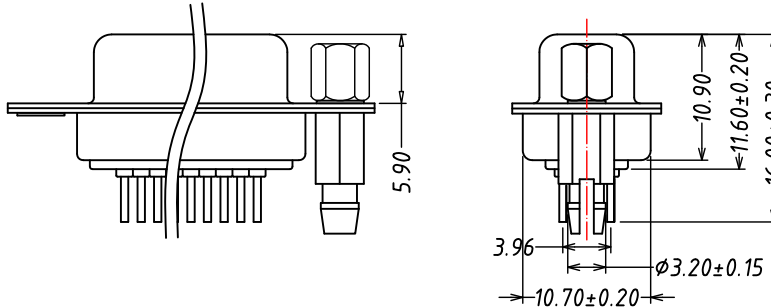

P.C BOARD LAYOUT
(26~62PIN)

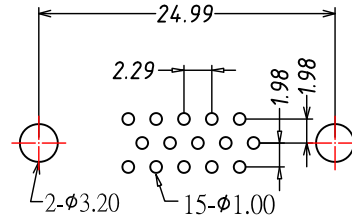

P.C BOARD LAYOUT
15PIN

Table 1

CODE	H
D	3.00
E	3.00
K	4.00
N	6.30
A	5.80

Table 2

NUMBER OF CONTACTS	A	B	C	D
	±0.25	±0.13	±0.38	±0.08
15	16.33	24.99	30.85	2.29
26	24.66	33.32	39.14	2.29
44	38.38	47.04	53.04	2.29
62	54.84	63.50	69.32	2.41

SPECIFICATIONS: ELECTRICAL SPECIFICATION

Contact Current Rating: 3 Amperes

Dielectric Withstanding Voltage:AC 1000/60ses.r.m.s.

Insulation Resistance: 5000 Megohm Min. at DC 500V

Contact Resistance:25 milliohm Max.

Operating Tempetature:-55°c ~ +105°c

MATERIALS:

Contacts:Brass or Phosphor bronze

Contacts: See number description

Insulator:PBT+G.F UL94V-0

Shell:Steel or Stainless steel

PART NO:

ZHP 009 F E 1 D 0 N 3 0

1, D-SUB Female Three Row sloder Type(Stamed PIN)	7 · Accessories :
2, Board lock material: N/A	0 : No accessories
3, Contact No. :	E : Lock brass hexagon screw,5.8*12.8mm
09=9PIN 15=15PIN	G: Lock iron hexagon screw · 4.8*12.8
25=25PIN 37=37PIN	H : Lock iron hexagon screw · 4.8*9.6mm
4, Contact Type:	J : Lock iron hexagon screw · 5.8*12.8mm
F=Female type,Brass (stamped PIN)	K : Lock brass hexagon screw,4.8*11.8mm
5, Contact plating :	8 · Shell material and Plating:
See table 3	N=SPCC,Plating nickel
6, Assembly :	A=SPCC,Front shell plating nickel
A=Rear rivet hole hexagon nut,5.8mm	and rear shell tin
B=No accessories	D= Stainless steel,Passivation
C=Front rivet no hole hexagon nut,5.8mm	Stainless steel, Plating nickel
D=Rear rivet hole hexagon nut,3.0mm	T=SPCC,Plating Tin
K=Rear rivet hole hexagon nut,4.0mm	9 · Color :
L=Rear rivet hole hexagon nut,6.5mm	1=White
N=Rear rivet hole hexagon nut,6.3mm	2=Blue
	3=Black
	10 · Remark:

Table 3

Gold Plated			Selective Gold Type		
CODE	Contact Area	Other Area	CODE	Contact Area	Other Area
C1	Gold Flash	Gold Flash	E1	Gold Flash	Tin plated
C2	Gold 3u"	Gold Flash	E2	Gold 3u"	Tin plated
C3	Gold 10u"	Gold Flash	E3	Gold 10u"	Tin plated
C4	Gold 15u"	Gold Flash	E4	Gold 15u"	Tin plated
C5	Gold 30u"	Gold Flash	E5	Gold 30u"	Tin plated

DSND	HUANGJM	DATE	2011-12-01	SCALE:		NAME:	
CHKD				VIEW:		D-SUB P.C.B Female Three Row Straight Type(Stamed PIN)	
APVD				UNIT:		mm	
 Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203						Part No: ZHP0XXFXXXXXX	
						Customer Part NO:(DWG NO.)	

unless otherwise specified tolerance:

. X±. 38,
. XX±. 25,
. XXX±. 15,

ANG ±2°

MARK DESCRIPTION DATE REVISED APPROVED

REVISIONS