


RoHS

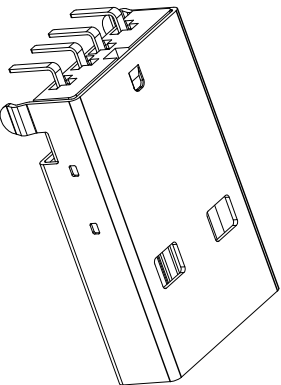

SPECIFICATIONS: ELECTRICAL SPECIFICATION

Contact Current Rating: 1.5 Amperes

Dielectric Withstanding Voltage: AC 500/60ses.r.m.s.

Insulation Resistance: 1000 Megohm Min. at DC 500V

Contact Resistance: 30 milliohm Max.

Operating Temperature: -25°C +105°C

MATERIALS:

Contacts: Brass or Phosphor bronze

Contacts Plating: See number description

Insulator: PBT+G.F UL94V-0

Shell:Steel or Brass

PART NO: ZUS R24 Mxx x01 N1
1 2 3 4 5 6 7 8 9 10

- 1, USB type

- ## 2, Performance:

R=Right Angle DIP Type

- 3, Sort:

2 = USB A TYPE 2.0

- 4, Contact No.:

- $4=4\text{PIN}$

- 5, Contact Type:

- M=Male type

6, Contact plating :
See table 1

- 7, Shell material:

- F: SPCC

- C: BRASS

- 8, Series number :

- 02

- 9, Shell Plating:

- N=Plating nickel

- 10 , Color :

- 1=White

- 2=Blue

- 3=Black





Table 1

Selective Gold Type		
CODE	Contact Area	Other Area
E1	Gold Flash	Tin plated
E2	Gold 3u"	Tin plated
E3	Gold 10u"	Tin plated
E4	Gold 15u"	Tin plated
E5	Gold 30u"	Tin plated

[illegible]