

RoHS


1.27mm Box Header SMT H=5.70 With or without post

SPECIFICATION




Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Operating Temperature:-40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL

94V-0
 Ordering Code:
 BHAM01- X - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦



- ① Series No:
- ② No.of Contacts
 06 08 10 14 16
 20 24 26 30 32
 34 40 44 50 60
 64 80 100
- ③ Contact Plating
 G0: Gold flash
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
- ④ Color Insulator
 B:Black
 U:Blue
 W:white
- ⑤ Insulator Material
 A:PA6T
 B: LCP
- ⑥ Packing
 A: Tray
 T: Tube
 U:Tube+CAP
 R: Tape&Reel
 W:Tape&Reel+CAP
- ⑦ A: Type A
 B: Type B

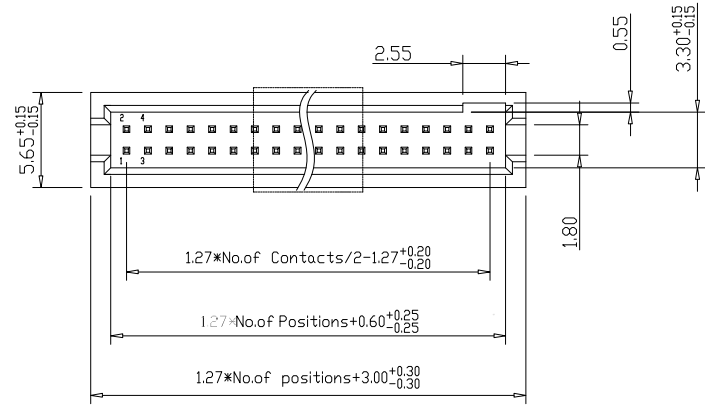

Recommended P. C. B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

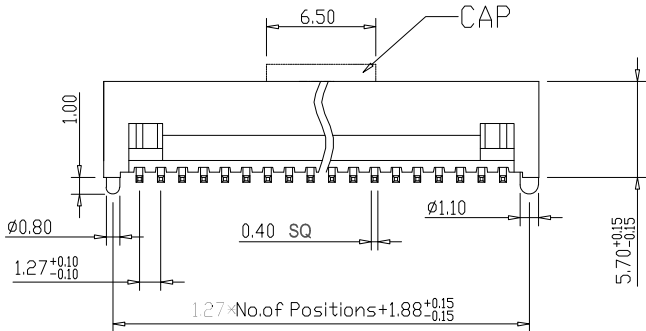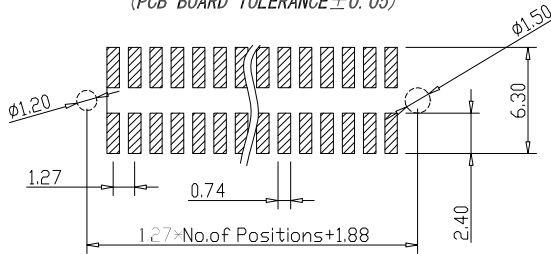

Type B

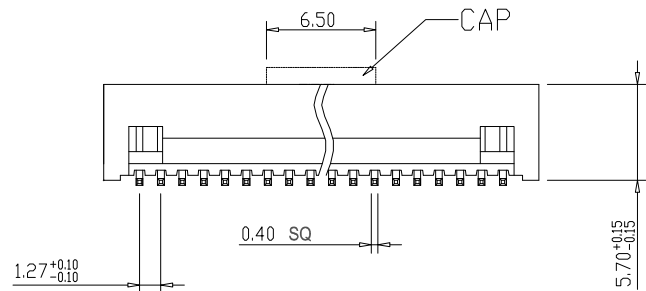

Type A

DSND	HUANG.J.M	DATE	2011-12-01	SCALE:	
CHKD				VIEW:	
APVD				UNIT:	mm

NAME:	1.27mm Box Header SMT H=5.70 With or without post
Part No:	BHAM02-xxxxxxx
Customer Part NO:(DWG NO.)	

unless otherwise specified tolerance:
 . X ± . 38,
 . XX ± . 25,
 . XXX ± . 15,
 ANG ± 2°



Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0769-81765203

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				