

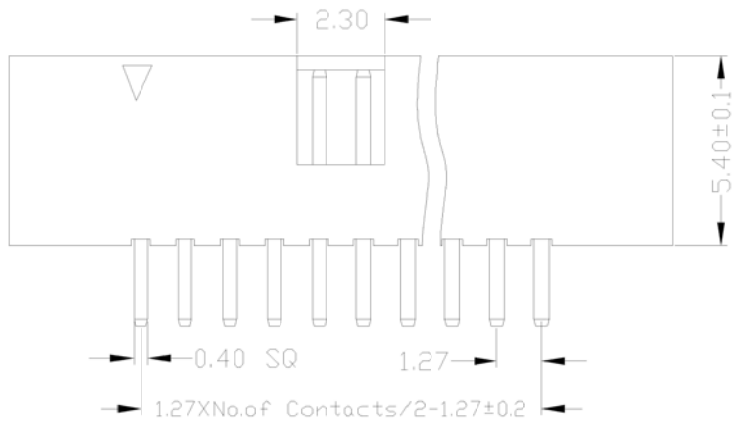


RoHS

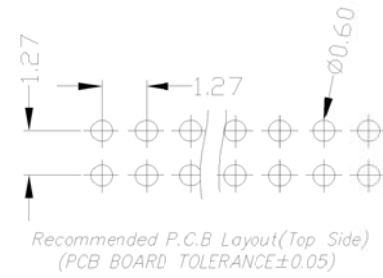

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Operating Temperature:-40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

BHAS04- X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No.of Contacts
10-100P
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ④ Color Insulator
B:Black
U:Blue
W:white
- ⑤ Insulator Material
A:PA6T
B: LCP
- ⑥ Packing
A: Tray
T: Tube

DSND	HUANGJLM	DATE	2011-12-01	SCALE:		NAME:	1.27mm Box Header 180°, H=5.4mm
CHKD				VIEW:		Part No:	BHAS04-XXXXXX
APVD				UNIT:	mm	Customer Part NO:(DWG NO.)	



Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0765-81765203

MARK	DESCRIPTION	DATE	REVISED	APPROVED	REVISIONS

unless otherwise specified tolerance:
 . X ± .38, ANG ± 2°
 . XX ± .25,
 . XXX ± .15,