
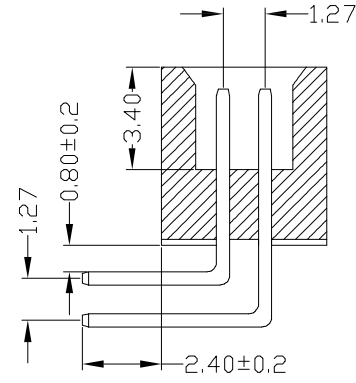
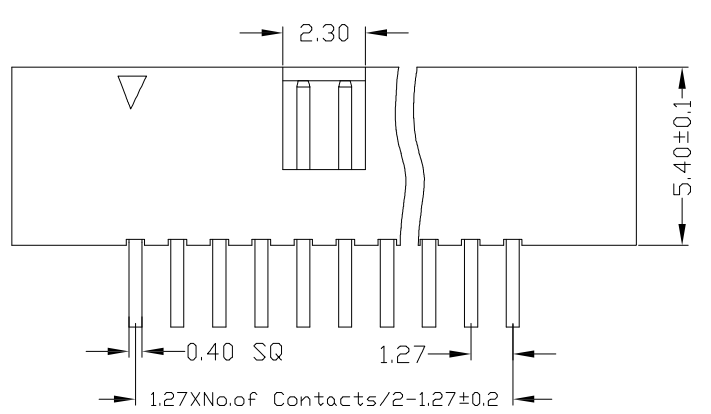
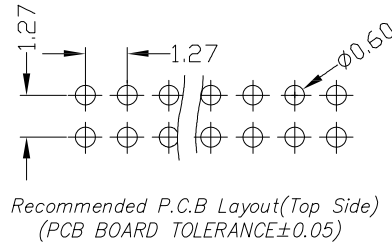


RoHS

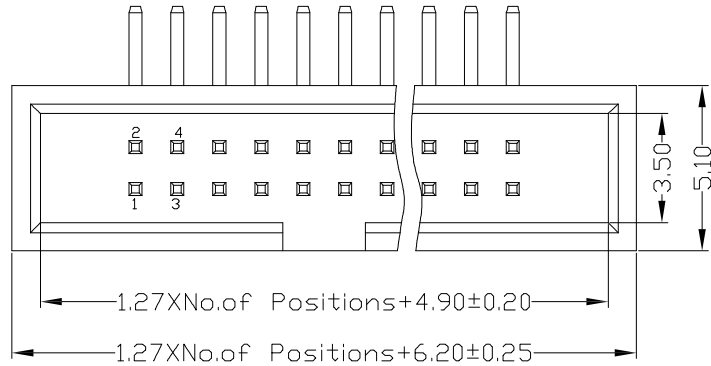

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 1000MΩmin
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0
 Operating Temperature: -40° C to +105° C

Ordering Code:

BHAR03 - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts 10-100P
- ③ Contact Plating
 G0: Gold flash
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
- ④ Color Insulator
 B:Black
 U:Blue
 W:White
- ⑤ Insulator Material
 A:PA6T
 B:LCP
- ⑥ Packing
 A:Tray
 T:Tube

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
 . X ± . 38,
 . XX ± . 25,
 . XXX ± . 15,
 ANG ± 2°

DSND	HUANGJM	DATE	2011-12-01	SCALE:		NAME:	
CHKD				VIEW:			1.27mm Box Header 90° , H=5.4mm
APVD				UNIT:	mm		Part No: BHAR03-XXXXXX
Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203						Customer Part NO:(DWG NO.)	