
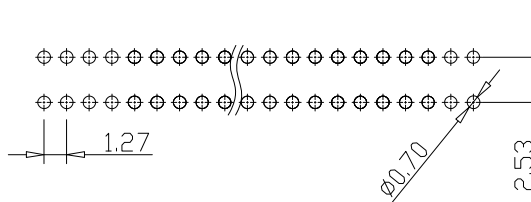


1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

RoHS

1.27*2.54mm Box Header 180° H=5.90


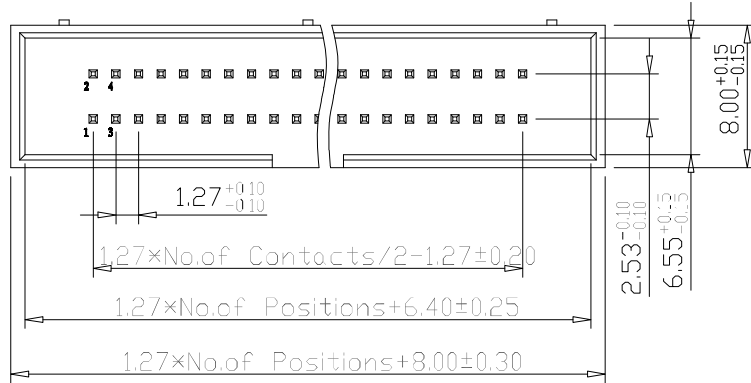


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATION

Current Rating: 1.0Amp
Insulation Resistance: 1000mΩ min
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:
BHBS02-X-X-X-X-X
① ② ③ ④ ⑤ ⑥

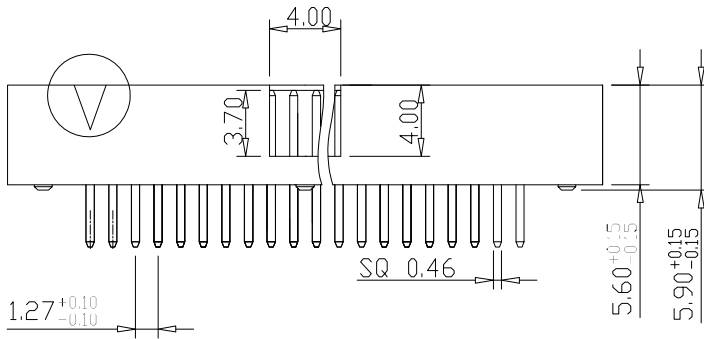

- ① Series No:
② No.of Contacts
06 08 10 14
16 20 26 30
34 40 50 60
80 100
③ Contact plating
G0:Gold flash
G1:3u"Gold
G2:5u"Gold
G3:10u"Gold
G4:15u"Gold
G5:30u"Gold
④ Color Insulator
B:Black
U:Blue
W:White
⑤ Insulator Material
A:PBT
B:PA6T
⑥ Packing
A:Tray
T:Tube

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
X±: 0.35
. X±: 0.25,
. XX±: 0.20,
. XXX±: 0.15,
ANG ±2°

DSND	HUANGJM	DATE	2017-12-05	SCALE:	NAME:
CHKD				VIEW:	1.27*2.54mm Box Header 180°H=5.90
APVD				UNIT: mm	Part No: BHBS02-xxxxxx
Dongguan Fushu Electronic Technology Co.,Ltd					Customer Part NO:(DWG NO.)
Tel:0755-81765247/41 Fax:0769-81765203					

