



Current Rating:	1.0Amp
Insulation Resistance:	500mΩ min
Contact Resistance:	20mΩ max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40°C to +105°C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PA6T+30%GF UL 94V-0

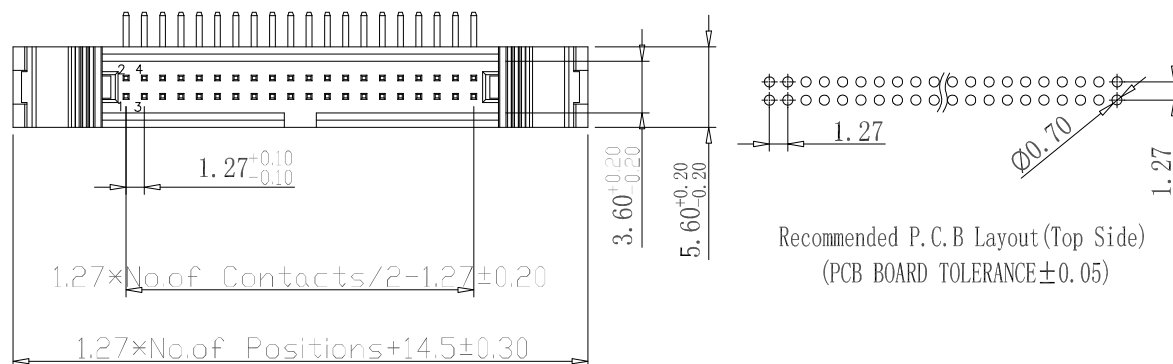

Ordering Code:
LHAR01-X-X-X-X-X
 ① ② ③ ④ ⑤ ⑥

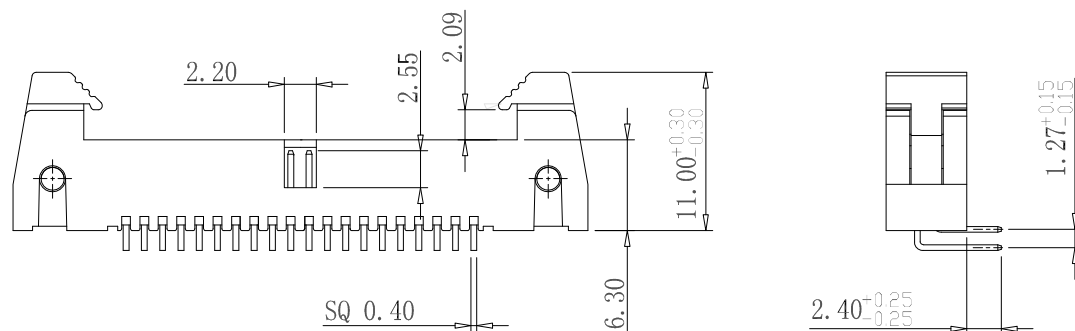

- ① Series No:
 - 10 14 16 20 24
 - 26 30 34 40 44
 - 50 60
 - ② No.of Contacts
 - ③ Contact plating
 - G0:Gold flash
 - G1:3u"Gold
 - G2:5u"Gold
 - G3:10u"Gold
 - G4:15u"Gold
 - G5:30u"Gold
 - ④ Color Insulator
 - B:Black
 - U:Blue
 - G:Gray
 - ⑤ Insulator Material
 - B:PA6T
 - C:LCP
 - ⑥ Packing
 - A:Tray
 - T:Tube

						unless otherwise specified tolerance: X±: 0.35 .X±:0.25, ANG±2° .XX±:0.20, .XXX±:0.15,
MARK	DESCRIPTION		DATE	REVISED	APPROVED	
	REVISIONS					

DSND	HUANG.J.M	DATE	2017-12-07	SCALE:		NAME:	1.27mm Ejector Header 90°
CHKD				VIEW:			
APVD				UNIT:		mm	
 Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203					Part No: L HAR01-XXXXX		
					Customer Part NO:(DWG NO.)		