
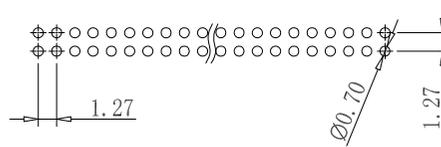


RoHS
COMPLIANT

1.27mm Ejector Header 180°

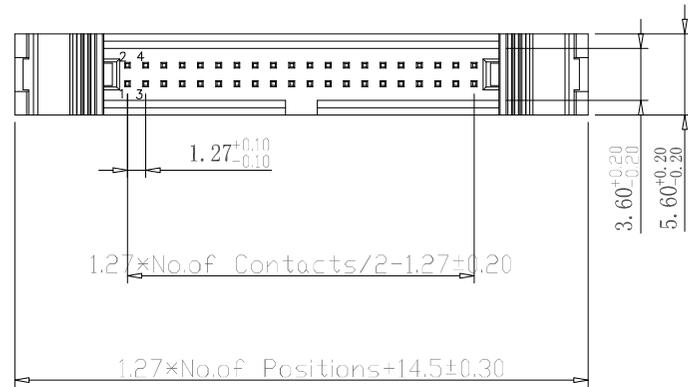



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

SPECIFICATION

Current Rating: 1.0Amp
 Insulation Resistance: 500MΩ min
 Contact Resistance: 20MΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

LHAS01 - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

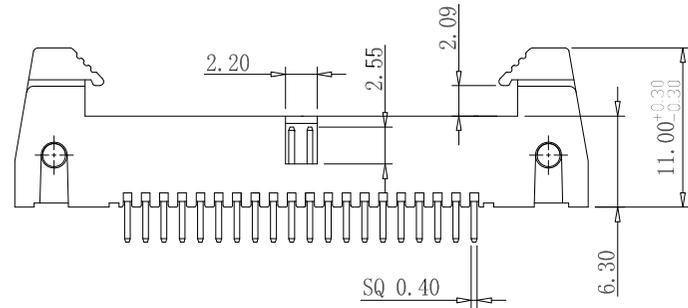

- ① Series No:
- ② No. of Contacts
10 14 16
20 24 26
30 34 40
44 50 60
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ④ Color Insulator
B:Black
U:Blue
G:Gray
- ⑤ Insulator Material
B:PA6T
C:LCP
- ⑥ Packing
A:Tray
T:Tube

DSND	HUANG.J.M	DATE	2017-12-07	SCALE:		NAME:	1.27mm Ejector Header 180°
CHKD				VIEW:		Part No:	LHAS01-XXXXX
APVD				UNIT:	mm	Customer Part NO:(DWG NO.)	

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
 X ± : 0.35
 . X ± : 0.25, ANG ± 2°
 . XX ± : 0.20,
 . XXX ± : 0.15,

Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0769-81765203