

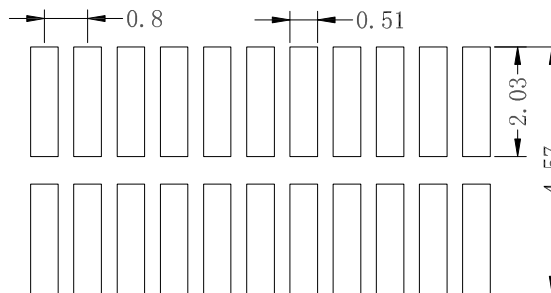
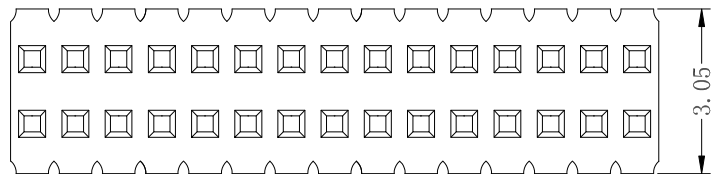


RoHS
COMPLIANT

0.8mm Pin Header Dual Row Angle S.M.T Type

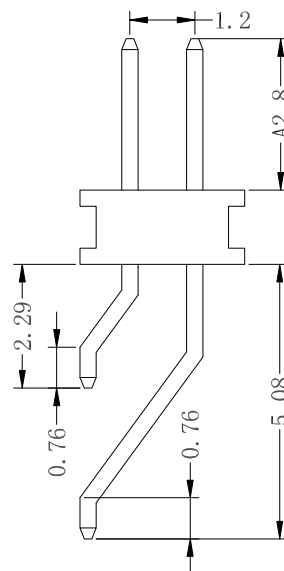

PCB LAYOUT

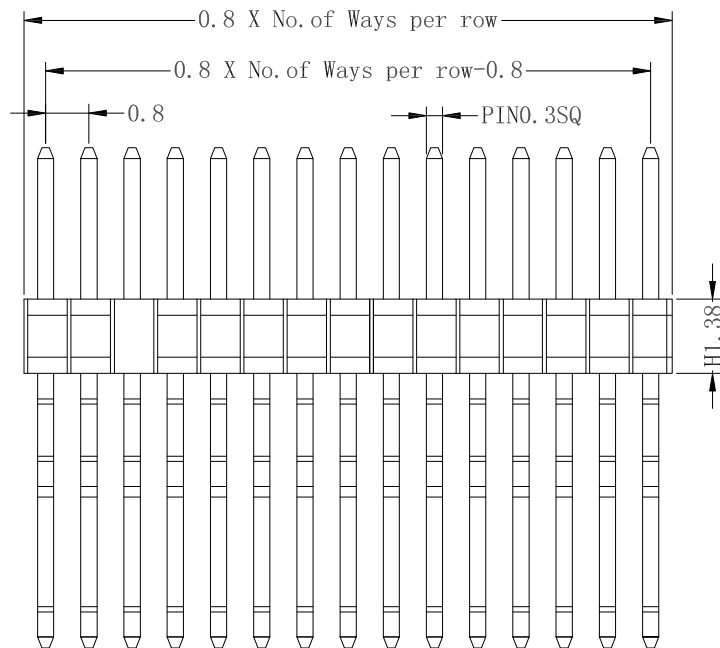

A
Optional

SPECIFICATION

Current Rating: 0.75Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHAR02 - X - X - D - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold, SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length: A+1.38+6.0. Please mark the desired length in the A
- ⑥ Insulator Material: B: PA6T, C: LCP
- ⑦ Packing: A: Tray, B: Bag, T: Tube, R: Tape&Reel

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
 X±: 0.35
 .X±: 0.25, ANG±2°
 .XX±: 0.20,
 .XXX±: 0.15,

DSND	HUANGJM	DATE	2017-12-08	SCALE:	
CHKD				VIEW:	
APVD				UNIT:	mm



Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0769-81765203

NAME: 0.8mm Pin Header Dual Row Angle SMT Type
 Part No: PHAR02-X-X-D-X-X-X
 Customer Part NO:(DWG NO.)