

SPECIFICATION

Current Rating:	0.75Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0
Standard:	PBT UL 94-V0 Black

Ordering Code:

PHAR01 - X - X - D - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

⑥ Insulator Material

B:PA6T

C:LCP

②No.of Contacts
02 To 100

③ **Contact Plating**
 G0: Gold flash
 G1: 3u" Gold
 G2: 5u" Gold
 G3: 10u" Gold
 G4: 15u" Gold
 G5: 30u" Gold
 SN: Tin

④ Connector Type
D: Dual





⑤ Pin Length:

$$A+B+D+H+0.93$$

Please mark the desired length in the A+B+D

⑦ Packing

B:Bag
T:Tube

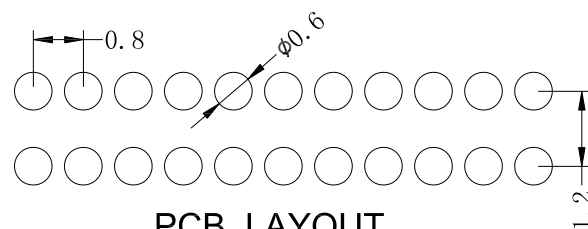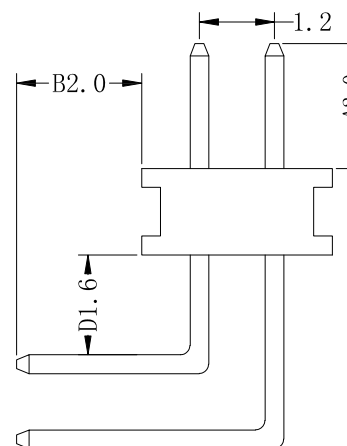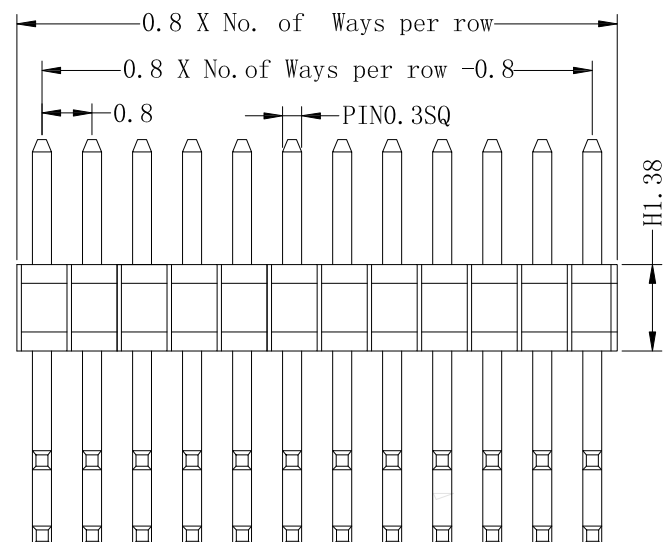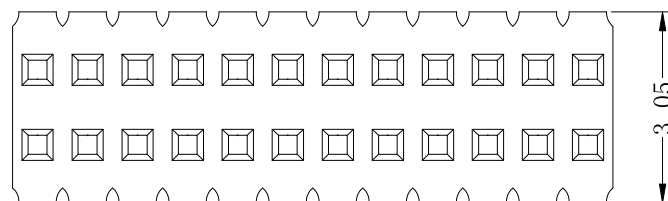

PCB LAYOUT

A	B	D
Optional	Optional	Optional

DSND	HUANG.J.M	DATE	2017-12-08	SCALE:		0.8mm Pin Header Dual Row Angle Type
CHKD				VIEW:		
APVD				UNIT: mm		
 Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203					Part No:	PHAR01 - X - X - D - X - X - X
					Customer Part NO:(DWG NO.)	