

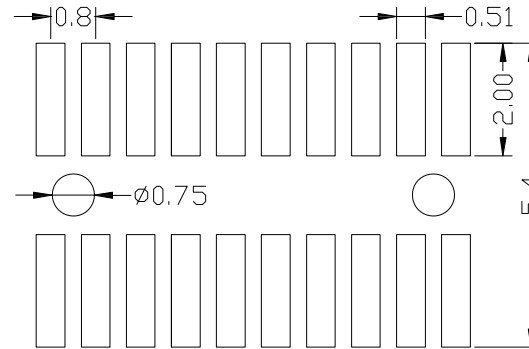
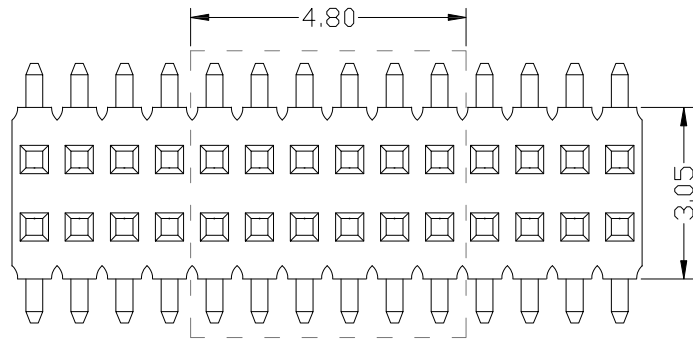


RoHS  
COMPLIANT


0.8mm Pin Header Dual Row S.M.T Type

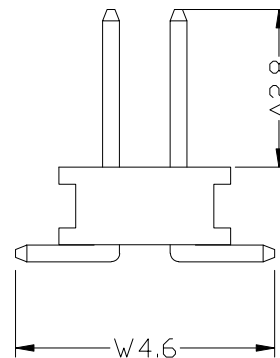

PCB LAYOUT

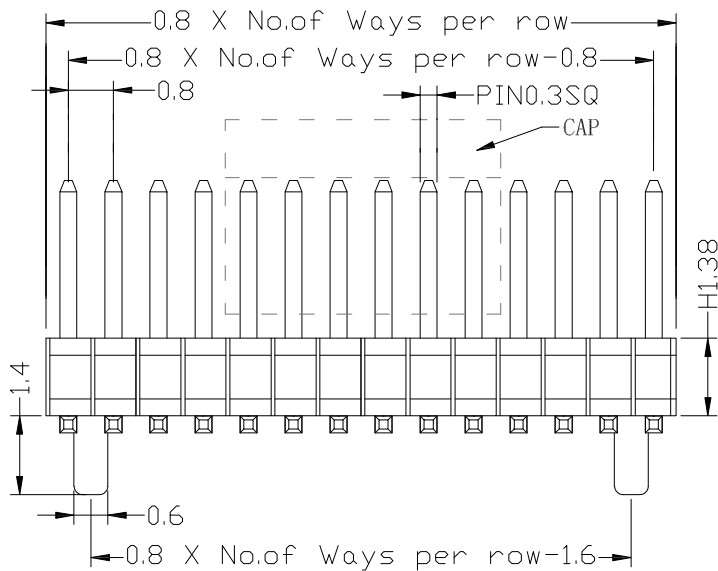

TYPE A

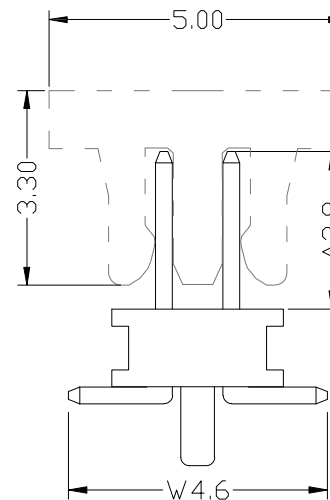

TYPE B

**SPECIFICATION**

Current Rating: 1Amp  
 Insulation Resistance: 5000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PBT,UL94V-0 Black

Ordering Code:

PHAM01 - X - X - D - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts  
02 To 100
- ③ Contact Plating  
G0: Gold flash  
G1: 3u" Gold  
G2: 5u" Gold  
G3: 10u" Gold  
G4: 15u" Gold  
G5: 30u" Gold  
SN: Tin
- ④ Connector Type  
D: Dual
- ⑤ Pin Length:  
A+H+D+(W-1.2)/2  
Please mark the desired length in the A/W/C
- ⑥ Insulator Material  
B: PA6T  
C: LCP
- ⑦ Packing  
A: Tray  
B: Bag  
T: Tube  
U: Tube+CAP  
R: Tape&Reel  
W: Tape&Reel+CAP
- ⑧ Special Function  
A: Type A  
B: Type B

A	W
Optional	

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:  
 X±: 0.35  
 .X±: 0.25,  
 .XX±: 0.20,  
 .XXX±: 0.15,  
 ANG±2°

DSND	HUANG.J.M	DATE	2017-12-08	SCALE:	
CHKD				VIEW:	
APVD				UNIT:	mm

**FSCONN.**  
 Dongguan Fushu Electronic Technology Co.,Ltd  
 Tel:0755-81765247/41 Fax:0769-81765203

NAME:	0.8mm Pin Header Dual Row S.M.T Type
Part No:	PHAM01-X-X-D-X-X-X-X
Customer Part NO:(DWG NO.)	