

RoHS
COMPLIANT

0.8 Pin Header Dual Row Double Plastic Straight Type





SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0 Black

Ordering Code:

PHAS02 - X - X - D - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
02 To 100
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A+B+C
Please mark the desired length in the A/B
- ⑥ Insulator Material
B: PA6T
C: LCP
- ⑦ Packing
B: Bag
T: Tube

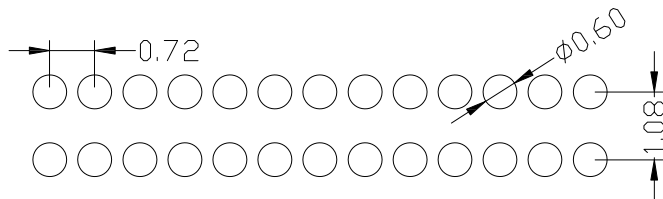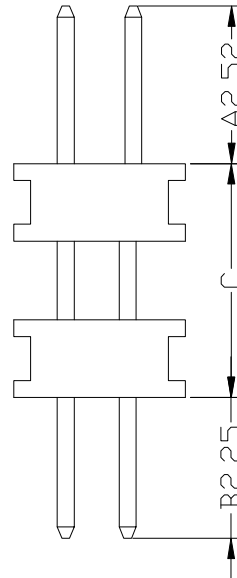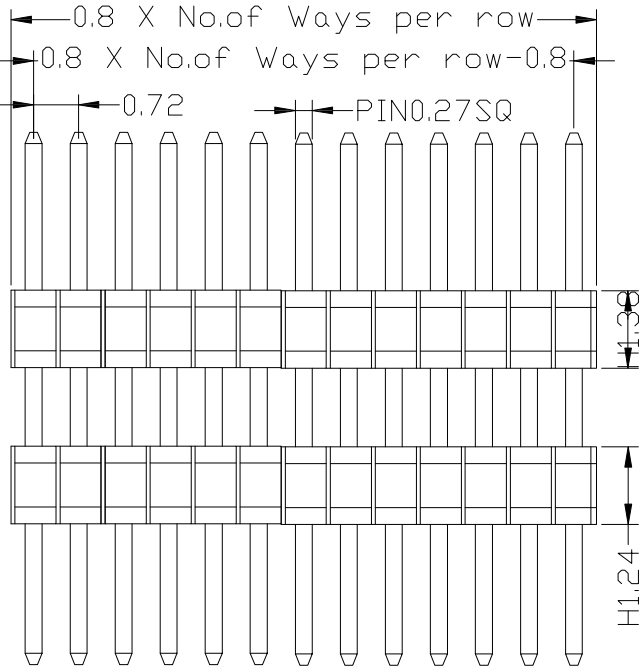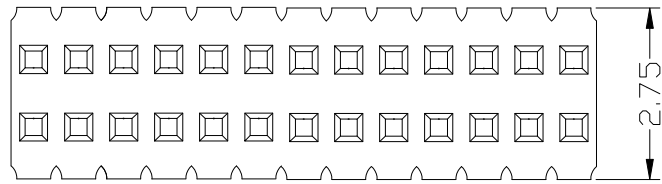

PCB LAYOUT

A	B	C
Optional	Optional	Optional

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
 X±: 0.35
 . X±: 0.25,
 . XX±: 0.20,
 . XXX±: 0.15,
 ANG ± 2°

DSND	HUANG.J.M	DATE	2017-12-08	SCALE:	
CHKD				VIEW:	
APVD				UNIT:	mm



Dongguan Fushu Electronic Technology Co., Ltd
 Tel: 0755-81765247/41 Fax: 0769-81765203

NAME: 0.8 Pin Header Dual Row Double Plastic Straight Type
 Part No: PHAS02-X-X-D-X-X-X
 Customer Part NO: (DWG NO.)