

RoHS
COMPLIANT

0.8mm Pin Header Straight Type Dual Row

SPECIFICATION





Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT, UL 94V-0 Black

Ordering Code:

PHAS01 - X - X - D - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
02 To 100
- ③ Contact Plating
G0: Gold flash
G1: 3U" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A+B+H
Please mark the desired length in the A/B
- ⑥ Insulator Material
B: PA6T
C: LCP
- ⑦ Packing
A: Tray
B: Bag
T: Tube

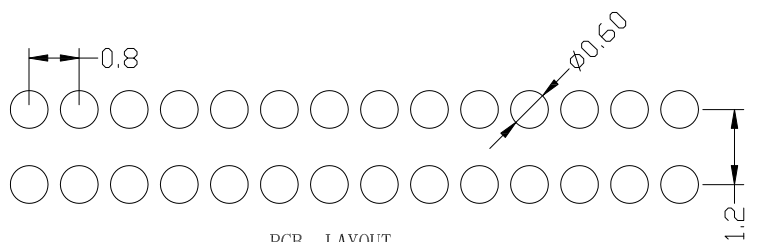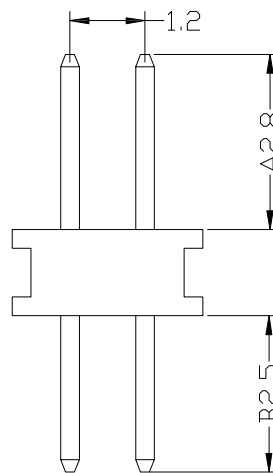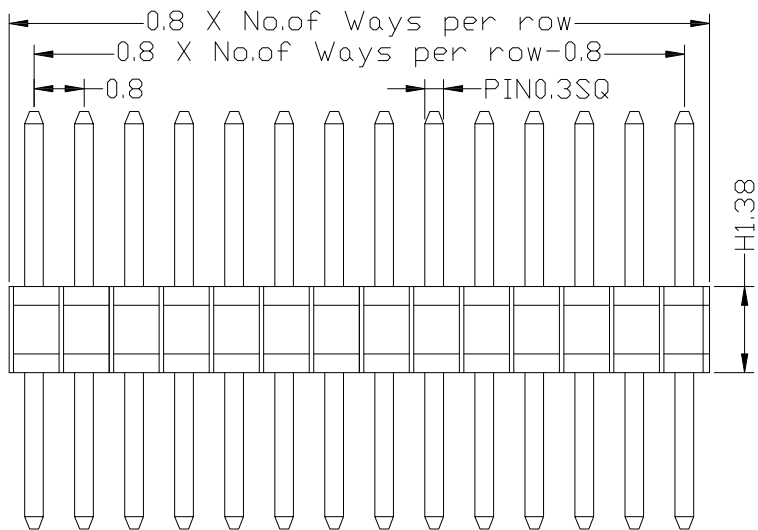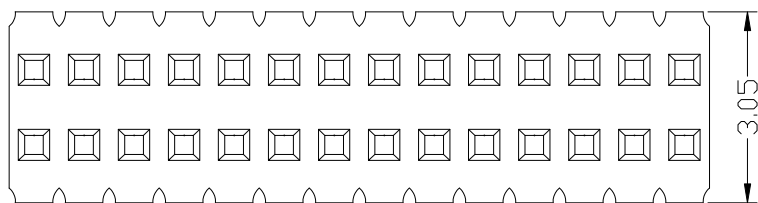

PCB LAYOUT

A	B
2.8	2.5
Optional	Optional

DSND	HUANGJM	DATE	2017-12-08	SCALE:		NAME:	0.8mm Pin Header Straight Type Dual Row
CHKD				VIEW:		Part No:	PHAS01-X-X-D-X-X-X
APVD				UNIT:	mm	Customer Part NO:(DWG NO.)	
						Dongguan Fushu Electronic Technology Co., Ltd Tel: 0755-81765247/41 Fax: 0769-81765203	

					unless otherwise specified tolerance: X±: 0.35 .X±: 0.25, .XX±: 0.20, .XXX±: 0.15,	ANG ± 2°
MARK	DESCRIPTION	DATE	REVISED	APPROVED		
REVISIONS						