

1.00mm Pin Header Dual Row Straight Type





SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	5000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PBT,UL 94V-0
	Standard:PBT,UL94V-0 Black

Ordering Code:

PHBS03 - X - X - D X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
02 To 100
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
D: Dual
- ⑤ Pin Length:
A+B+H1/H2
Please mark the desired length in the A/B
- ⑥ Insulator Material
B: PA6T
C: LCP
D: PA46
- ⑦ Packing
A: Tray
B: Bag
T: Tube
- ⑧ Plastic High
H1: 1.0mm
H2: 1.5mm

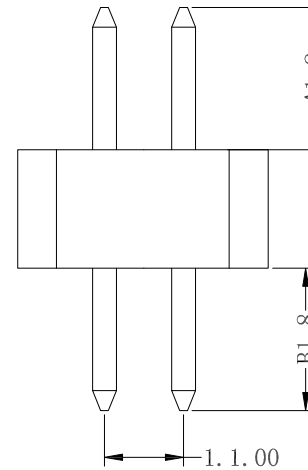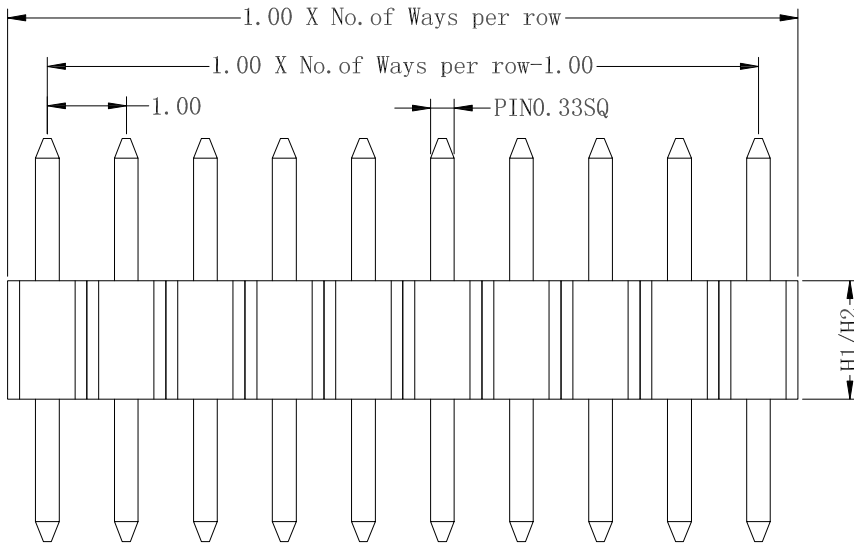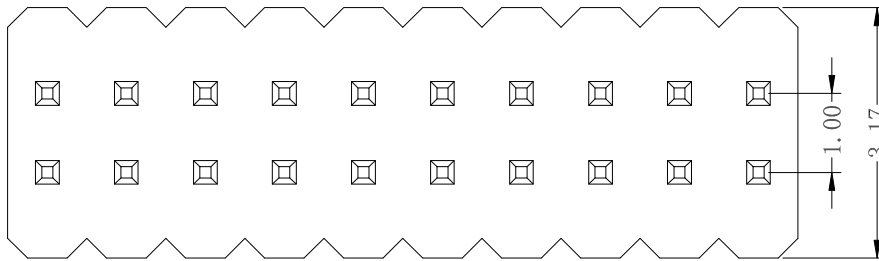

PCB LAYOUT

A	B
1.80	1.80
Optional	

DSND	HUANGJM	DATE	2017-12-08	SCALE:		NAME: 1.00mm Pin Header Dual Row Straight Type
CHKD				VIEW:		
APVD				UNIT: mm		
Part No: PHBS03-X-X-D-X-X-X-X						Customer Part NO:(DWG NO.)

unless otherwise specified tolerance:
 X±: 0.35
 .X±: 0.25,
 .XX±: 0.20,
 .XXX±: 0.15,

ANG ±2°



Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0769-81765203

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				