

RoHS COMPLIANT

1.00mm Pin Header Dual Row Double Plastic Straight Type

SPECIFICATION





Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHBS04 - X - X - D - X - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No.of Contacts: 02 To 100
- ③ ContactPlating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold, SN: Tin
- ④ Connector Type: D: Dual
- ⑤ Pin Length: A+B+C
Please mark the desired length in the A/B
- ⑥ Insulator Material: B: PA6T, C: LCP, D: PA46
- ⑦ Packing: A: Tray, B: Bag, T: Tube
- ⑧ Plastic High: H1: 1.0mm, H2: 1.5mm

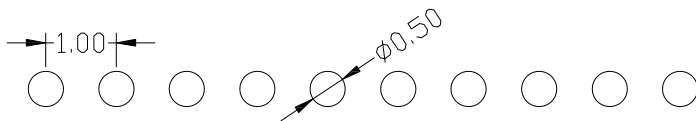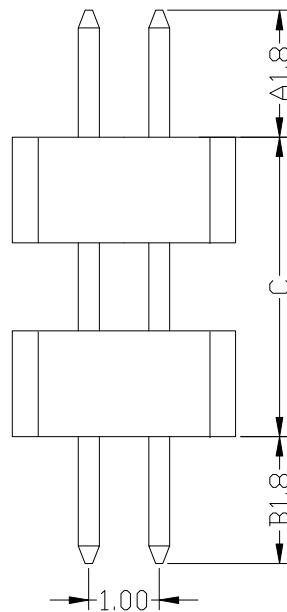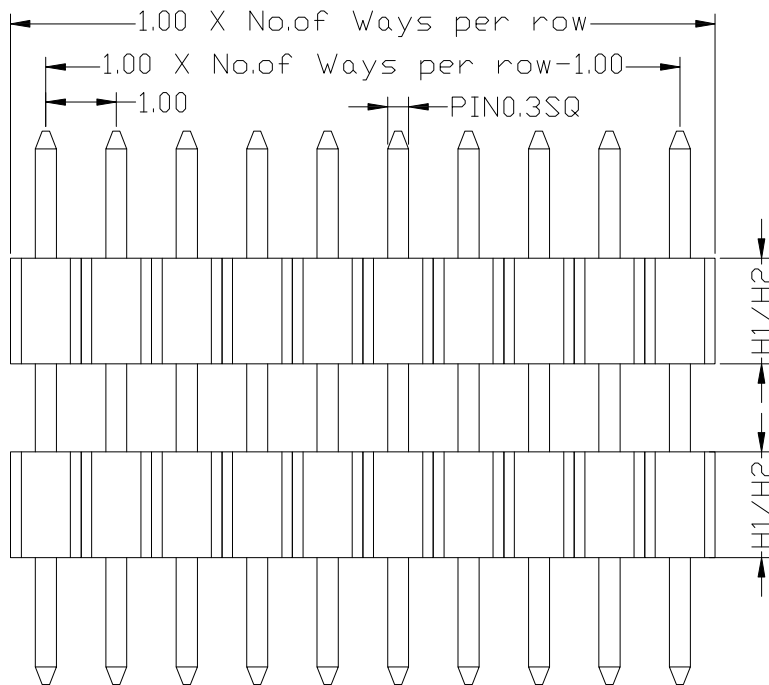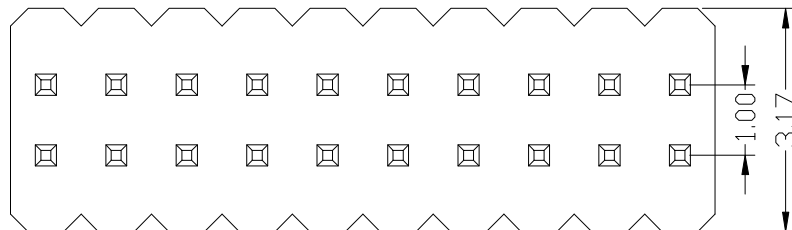

PCB LAYOUT

A	B	C
1.80	1.80	Optional
Optional		

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
 X±: 0.35
 . X±: 0.25, ANG ± 2°
 . XX±: 0.20,
 . XXX±: 0.15,

DSND	HUANGJM	DATE	2017-12-08	SCALE:	
CHKD				VIEW:	
APVD				UNIT:	mm



Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0769-81765203

NAME: 1.00mm Pin Header Dual Row Double Plastic Straight Type
 Part No: PHBS04-X-X-D-X-X-X-X
 Customer Part NO:(DWG NO.)