
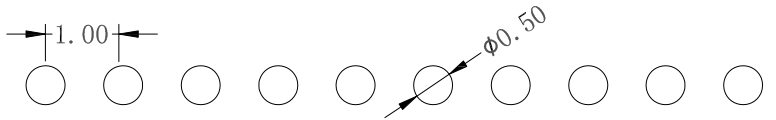
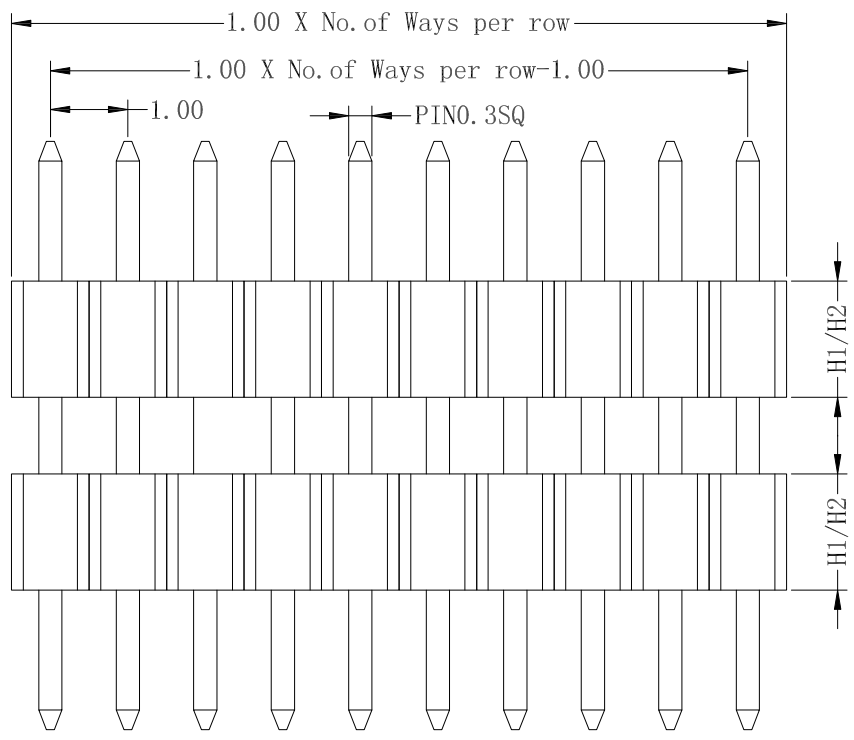


RoHS COMPLIANT

1.00mm Pin Header Single Row Double Plastic Straight Type

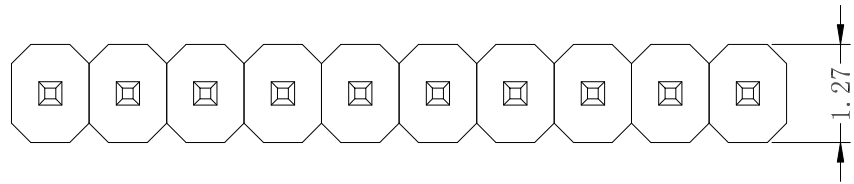

PCB LAYOUT

SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHBS02 - X - X - S - X - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts
01 To 50
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
S: Single
- ⑤ Pin Length:
A+B+C
Please mark the desired length in the A/B
- ⑥ Insulator Material
B: PA6T
C: LCP
D: PA46
- ⑦ Packing
A: Tray
B: Bag
T: Tube
- ⑧ Plastic High
H1: 1.0mm
H2: 1.5mm

A	B	C
1.8	1.8	✓
Optional		

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
 X±: 0.35
 . X±: 0.25, ANG ± 2°
 . XX±: 0.20,
 . XXX±: 0.15,

DSND	HUANGJM	DATE	2017-12-08	SCALE:	
CHKD				VIEW:	
APVD				UNIT:	mm

FSCONN

Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0769-81765203

NAME: 1.00mm Pin Header Single Row Double Plastic Straight Type

Part No: PHBS02-X-X-S-X-X-X-X

Customer Part NO:(DWG NO.)