

RoHS COMPLIANT

1.00mm Pin Header Single Row S.M.T Type

SPECIFICATION







Current Rating: 1Amp
 Insulation Resistance: 5000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PBT,UL 94V-0 Black

Ordering Code:

PHBM01 - X - X - S - X - X - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No:
- ② No.of Contacts
01 To 50
- ③ Contact Plating
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
SN: Tin
- ④ Connector Type
S:Single
- ⑤ Pin Length:
A+W/2+H
Please mark the desired length in the A/W/H
- ⑥ Insulator Material
B:PA6T
C:LCP
D:PA46
- ⑦ Packing
A:Tray
B:Bag
T:Tube
R:Tape&Reel
- ⑧ Special Function
A: Type A
B: Type B
- ⑨ Plastic High
H1: 1.0mm
H2: 1.5mm

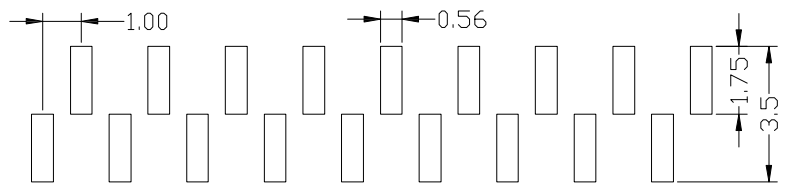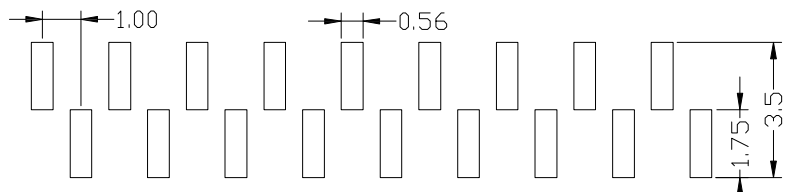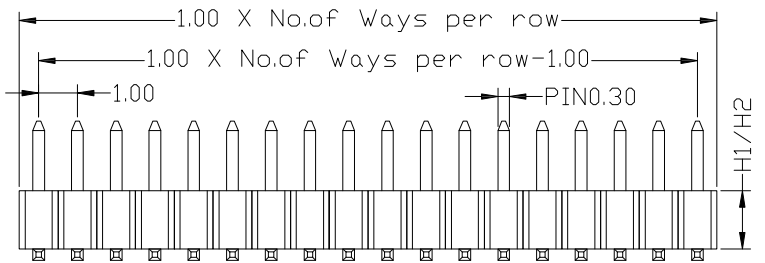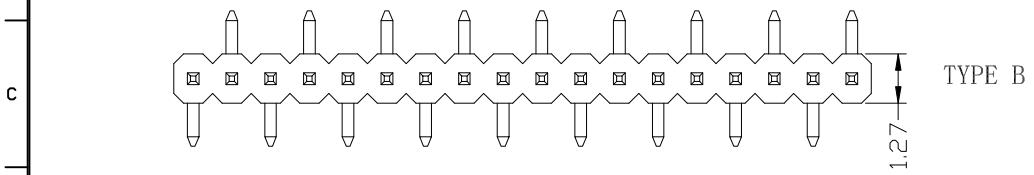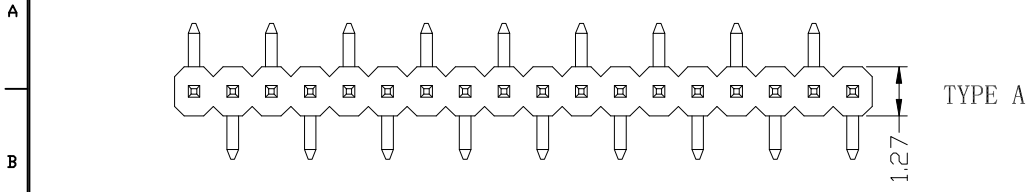

PCB LAYOUT

A	W
1.80	3.50
Optional	

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
 X±: 0.35
 .X±: 0.25,
 .XX±: 0.20,
 .XXX±: 0.15,
 ANG ± 2°

DSND	HUANGJM	DATE	2017-12-08	SCALE:	
CHKD				VIEW:	
APVD				UNIT:	mm

Dongguan Fushu Electronic Technology Co.,Ltd
 Tel:0755-81765247/41 Fax:0769-81765203

NAME: 1.00mm Pin Header Single Row SMT Type
 Part No: PHBM01-X-X-S-X-X-X-X-X
 Customer Part NO:(DWG NO.)