RoHS

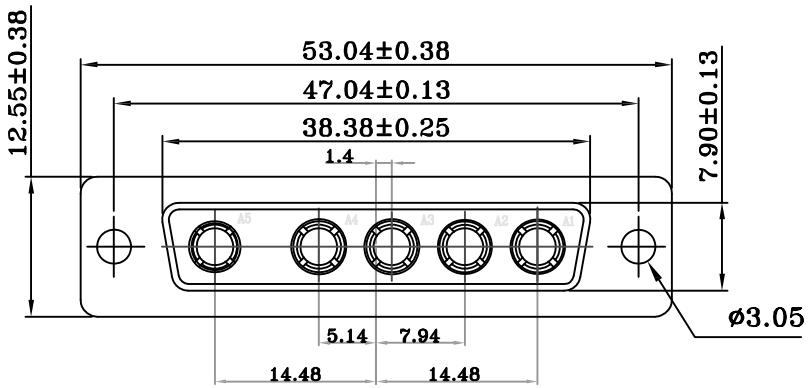



PART NO.	Current Rating	Dimension ø A
1198-055-815-000	40 AMPS	ø4.6
1198-055-615-000	30 AMPS	ø3.2
1198-055-415-000	20 AMPS	ø2.8
1198-055-215-000	10 AMPS	ø1.7

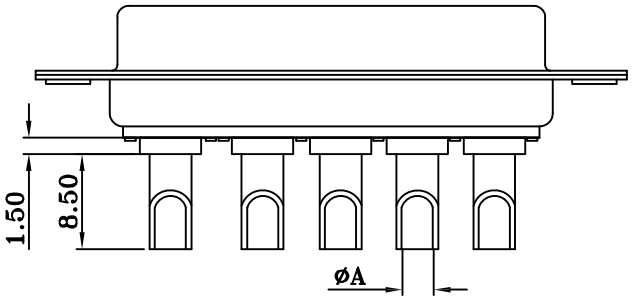

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
HIGH POWER CONTACT MATERIAL: BRASS, 2u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,OR 40 AMPS
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C

MARK	DESCRIPTION	DATE	REVISED	APPROVED
	REVISIONS			

未注公差：
. X±. 30, ANG±2°
. XX±. 25,
. XXX±. 15,

DSND	T.X.K	DATE	2011-12-01	SCALE: 1:1	NAME: 5W5母头
CHKD	D.Y.Q	DATE	2011-12-01	VIEW:	Part No: 1198-055-815-000
APVD	S.K.Bai	DATE	2011-12-01	UNIT: mm	Customer Part NO:(DWG NO.)

福蜀电子(东莞)有限公司