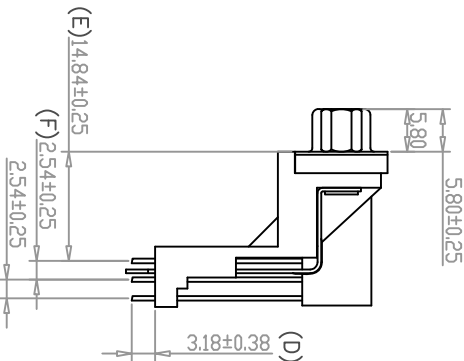


ELECTRICAL CHARACTERISTICS:

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.

Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance: 1000 Megohms Minimum at DC 500V

Contact Resistance: 25 Milliohms Maximum.

Operating Temperature: -55°C to $+105^{\circ}\text{C}$.

MECHANICAL CHARACTERISTICS:

Insertion Force:341 g.Maximum.
Sederation Force:21 g.Minimum.
Contact

MATERIALS.

CONTACTS:

Insulator: PBT

UL 94V-0 Rated.
Shell: Cold Roller Steel.

FINISHES:

Contact: Gold Flash Or Full Gold.
Shell: Tin Or Nickel Plated

[illegible]

RECOMMENDED P.C.B. LAYOUT

INSPECTION DIMENSION:(A)~(G)

				NAME: D-SUB 15 FEMALE HIGH DENSITY	
DSND		HUANGSOL	DATE	2016.12.15	SCALE: 1:1
CHKD			DATE		
VIEW:					
APVD			DATE		UNIT: mm
Part No:					
Customer Part No:QJWVG-NO3					