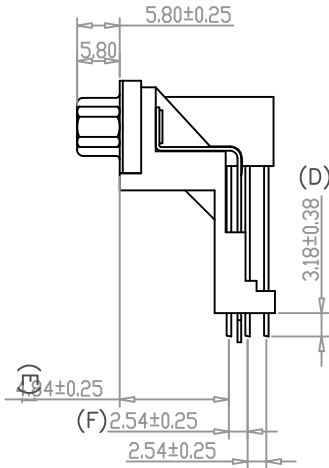
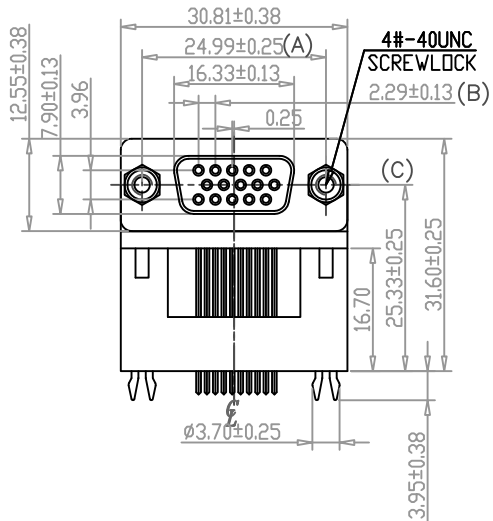


SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:1000 Megohms Minimum.at DC 500V.
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.
Contact Seperation Force:21 g.Minimum.

MATERIALS:

Contacts: Brass.
Insulator: PBT Or High Temperature Plastic
Shell: Gold, Baller, Steel UL 94V-0 Rated.

FINISHES:

Contact: Gold Flash Or Full Gold.
Shell: Tin Or Nickel Plated.

RECOMMENDED P.C.B. LAYOUT

INSPECTION DIMENSION:(A)~(G)

MARK	DESCRIPTION		DATE	REVISED	APPROVED
	REVISIONS				

未注公差:

$$\begin{aligned} & .X \pm .38, \\ & .XX \pm .25, \\ & .XXX \pm .15, \end{aligned}$$
 $\text{ANG} \pm 2^\circ$

DSND	HUANGSDL	DATE	2016.12.15	SCALE:	1:1	NAME: D-SUB 15 FEMALE HIGH DENSITY
CHKD		DATE		VIEW:		
APVD		DATE		UNIT:	mm	Part No:
 Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203						Customer Part NO:(DWG NO.)