

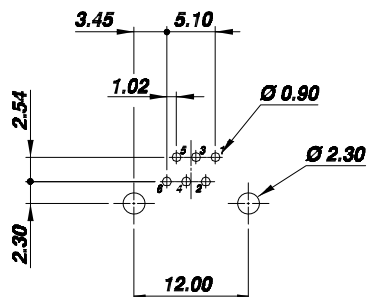



RoHS Compliant



PCB LAYOUT
(Top View)



NOTES:

MATERIAL:

1. HOUSING MATERIAL :PBT,PA66,PA46(UL 94V-0)
2. CONTACT MATERIAL :ROUND PINS-0.46mm DIAMETER PHOSPHOR BRONZE;
GOLD PLATING OVER NICKEL

ELECTRICAL/PHYSICAL:

1. VOLTAGE RATING :125 VAC RMS
2. CURRENT RATING :1.5 AMP
3. CONTACT RESISTANCE :30 MILLIOHMS MAX2
4. INSULATION RESISTANCE :500 MEGOHMS MIN @500V DC
5. DIELECTRIC WITHSTANDING RISTANCE :1000V AC RMS 60Hz. 1MIN
6. DURABILITY :750 CYCLES MIN
7. TEMPERATURE :-40 °C/+85°C

FSRJ1105 X X - X X X X X X X								
No. Of Positions	No. Of Contacts	Shield	High	Panel	Gap	Plastic	Color	Gold Plating
4, 6 or 8	2, 4, 6 or 8	0-w/0 Shield 1-w/ Shield	1-H=13 2-H=15	0-w/0 Panel 1-w/ Panel	0-w/0 Gap 1-w/ Gap	1-PBT 2-PA66 3-PA46	1-Black 2-Gray 3-Other	1-G/Fu" 2-3u" 3-6u" 4-15u" 5-30u" 6-50u"

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
MM
.00±0.25
.000±0.13
.0000±0.05

DSND	HUANGJM	DATE	2018-1-18	SCALE:	NAME:
CHKD				VIEW:	SIDE ENTRY PCB JACK
APVD				UNIT: mm	Part No: FSRJ1105-XXXXXXX
Dongguan Fushu Electronic Technology Co.,Ltd					Customer Part NO:(DWG NO.)
Tel:0755-81765247/41 Fax:0769-81765203					