

RoHS Compliant





NOTES:

MATERIAL:

- 1. HOUSING MATERIAL : PBT,PA66,PA46(UL 94V-0)
- 2. CONTACT MATERIAL : ROUND PINS-0.46mm DIAMETER PHOSPHOR BRONZE; GOLD PLATING OVER NICKEL
- 3. SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED
- 4. LED : OPTION

ELECTRICAL/PHYSICAL:

- 1. VOLTAGE RATING : 125 VAC RMS
- 2. CURRENT RATING : 1.5 AMP
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX2
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @500V DC
- 5. DIELECTRIC WITHSTANDING RISTANCE : 1000V AC RMS 60Hz. 1MIN
- 6. DURABILITY : 750 CYCLES MIN
- 7. TEMPERATURE : -40 °C/+85°C

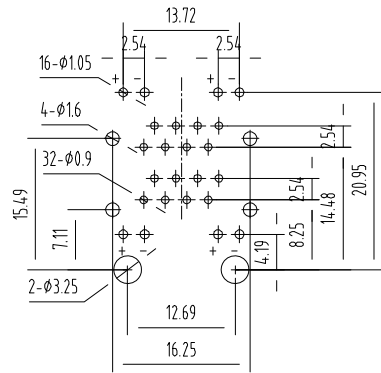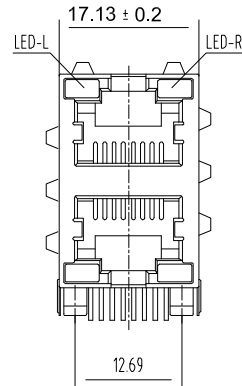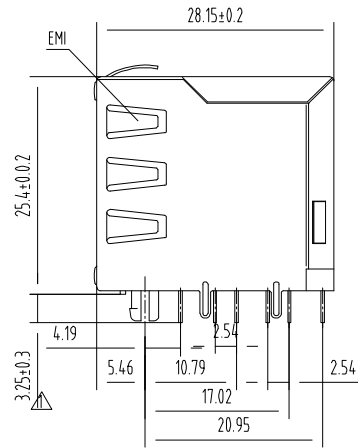

FSRJ4508 1-X X-X X X X X X

No. Of Positions	No. Of Contacts	Ports	Led Style	Shield	Back Peg	Plastic	Gold Plating
8	4, 6 or 8	1-2x1 2-2x2 4-2x4 5-2x5 6-2x6 8-2x8	0-w/O Led 1-Y/G 2-G/Y 3-R/G 4-G/R 5-Y/Y 6-G/G 7-Other	0-w/O Shield 1-Shielded w/EMI 2-Shielded w/O EMI	0-w/O Back Peg 1-1 Back Peg 2-2 Back Peg	1-PBT 2-PA66 3-PA46	1-G/Fu" 2-3u" 3-6u" 4-15u" 5-30u" 6-50u"

PC Board Layout  
Component Side Shown

DSND	HUANGJM	DATE	2018-1-18	SCALE:		NAME:	RJ45 JACK 2×1 LED HL-59L-01 2×1EMI
CHKD				VIEW:		Part No:	FSRJ4508 1-XXXXXX
APVD				UNIT:		mm	Customer Part NO:(DWG NO.)

unless otherwise specified tolerance:				
MM				
.00±0.25 .000±0.13 .0000±0.05				
MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				



Dongguan Fushu Electronic Technology Co.,Ltd  
Tel:0755-81765247/41 Fax:0769-81765203