
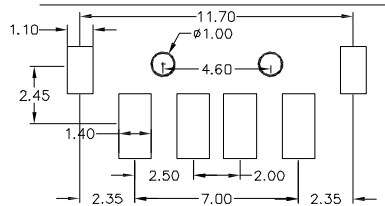


ROHS

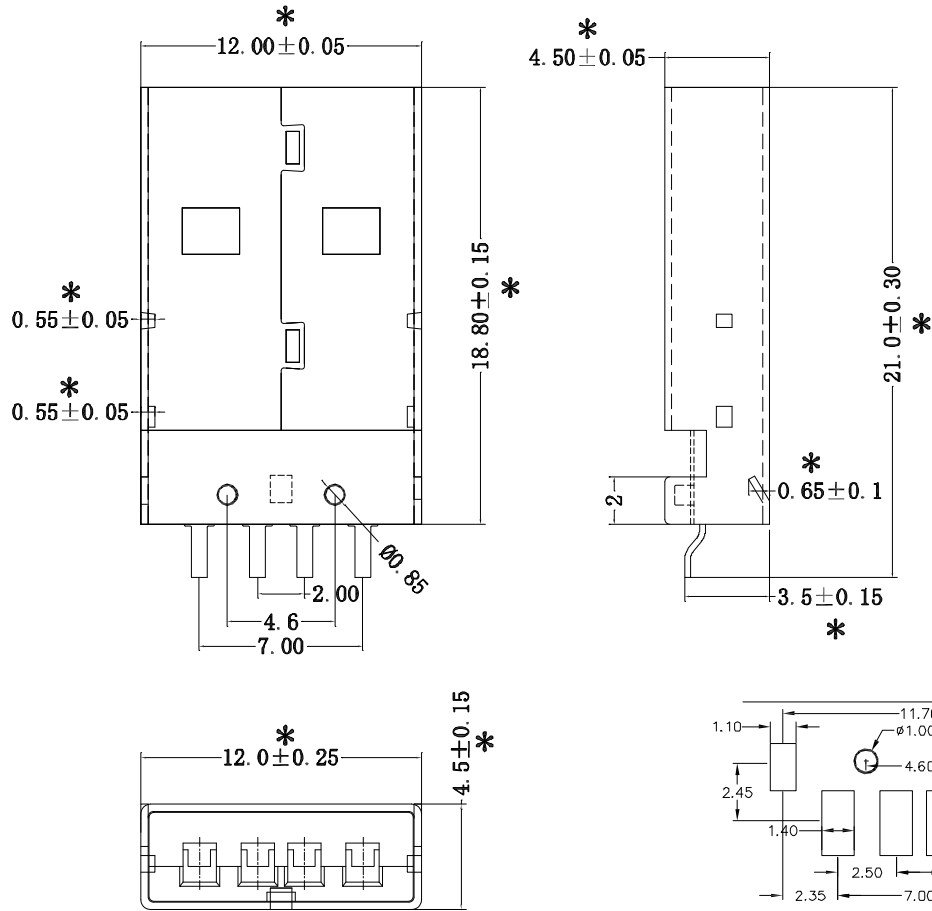

产品规格说明: (specifications)
电器特性: (Electrical characteristics)

- 最大值30毫欧: (30 milliohms MAX)
2. 耐压: (Dielectric Withstanding Voltage:)
500 伏特交流电 (500V AC AT Sea Level)
3. 绝缘阻抗: (Insulation Resistance:)
最小值1000兆欧姆 (1000 mega-ohms MIN)

PART NO: ZUS S 2 4 ME 1 F 01 N 3
1 2 3 4 5 6 7 8 9 10

- | | |
|-----------------------------|-------------------------|
| 1, USB type | 7, Shell material : |
| 2, Performance: | F: SPCC |
| S=SMT type | C: BRASS |
| 3, Sort: | 8, Series number : |
| 2 = USB A TYPE 2.0 | 01 |
| 4, Contact No. : | 9, Shell Plating: |
| 4=4PIN | N=Plating nickel |
| 5, Contact Type&Material: | 10, Housing material&r: |
| M=Male type,Brass | 1=PBT,White |
| P=Male type,Phosphor bronze | 3=PBT,Black |
| 6, Contact plating : | L=LCP,Black |
| See table1 | |

Table 1

Selective Gold Type		
CODE	Contact Area	Other Area
E1	Gold Flash	Tin plated
E2	Gold 3u"	Tin plated
E3	Gold 10u"	Tin plated
E4	Gold 15u"	Tin plated
E5	Gold 30u"	Tin plated

					未标注公差
					0.0 ±0.38 ± 2°
					0.00 ±0.25
					0.000±0.15
MARK	DESCRIPTION	DATE	REVISED	APPROVED	
REVISIONS					

DSND	HUANGSDL	DATE	2018.01.25	SCALE:	NAME: USB A TYPE Male AMT-01
CHKD		DATE		VIEW:	
APVD		DATE		UNIT: mm	Part No: ZUSS24ME1F01N3
Dongguan Fushu Electronic Technology Co.,Ltd					Customer Part NO:(DWG NO.)
Tel:0755-81765247/41 Fax:0769-81765203					