

- 1.Material
- 1.1:Shell:Brass
- 1.2:Shell plating:Nickel plating 12H
- 1.3:Insulator color:Blue
- 1.4:Insulator & color:LCF+Blue
- 1.5:Contacts:Brass or Phosphor bronze
- 1.6:Contact plating :Gold flash /Tin plated
- 2.Electrical specification
- 2.1 Contact Current Rating:1.5 Amperes MIN
IPIN/4PIN 2.0 MAX
- 2.2 Insulation Resistance:1000M Ω MIN
- 2.3 Contact Resistance:30m Ω MAX
- 2.4 Dielectric with standing voltage:500V AC
- 2.5 Operating Temperature:-55℃ ~ +85℃
- 3.Insertion and extraction force
- 3.1 Insertion:3.57Kg_f Max
- 3.2 Extraction:1.02Kg_f Min

PART NO: ZUS39SE1C01NP

1. USB type

2. Performance:

3. Sort:

4. Contact No.:

5. Contact type:

6. Contact plating:

7. Shell material:

B=Right Angle DIP Type

S=Snout type

U= USB B TYPE 2

S= USB A TYPE 30

S=9PIN

F=Female type:Brass

S=Female type:Phosphor bronze

N=Male type:Brass

P=Male type:Phosphor bronze

See table1

F:SPCC

G:BRASS

8. Surface number:

9. Shell Plating:

N=Plating Tin

10. Housing material:Color:


1-PBT:White

2-ABS:Black


P-LCP:Blue

Table 1

Selective Gold Type		
CODE	Contact Area	Other Area
E1	Gold Flash	Tin plated
E2	Gold 30"	Tin plated
E3	Gold 100"	Tin plated
E4	Gold 150"	Tin plated
E5	Gold 300"	Tin plated

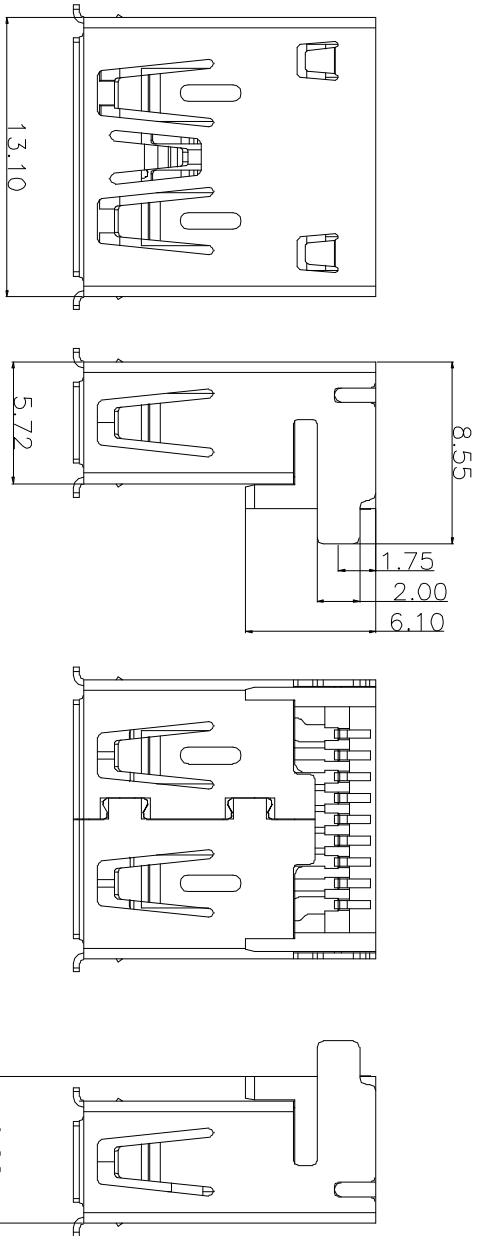

PCB LAYOUT

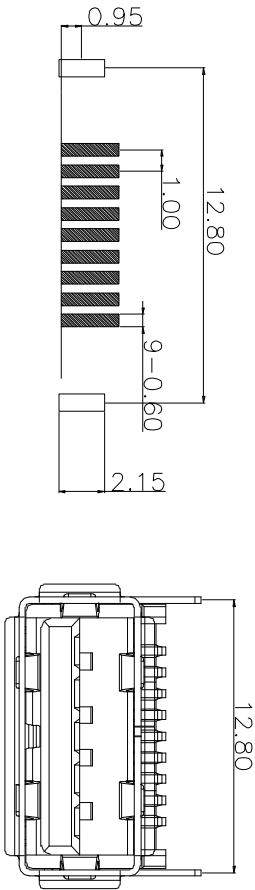

NAME:		SCALE:	
DSND	HUANGSDL	DATE	2018.01.25
CHKD		DATE	
APVD		DATE	
VIEW:		UNIT: mm	
Part No:		ZUS39SE1C01NP	
DESCRIPTION		USB A type Female 3.0 SMT-01	
MARK		Customer Part No.(DWG NO.)	
REVISIONS			
DATE	REVISED	APPROVED	
未标注公差 ± 2°			
0.0 ±0.38			
0.00 ±0.25			
0.000±0.15			



Dongguan Fushu Electronic Technology Co.,Ltd
Tel:0755-81765247/41 Fax:0769-81765203