
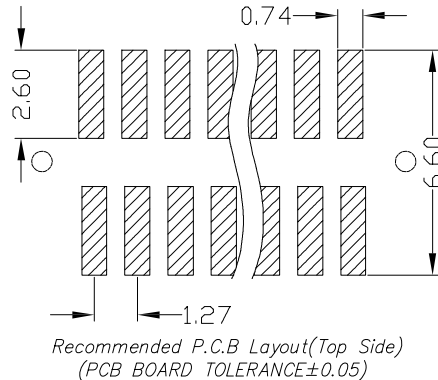


RoHS

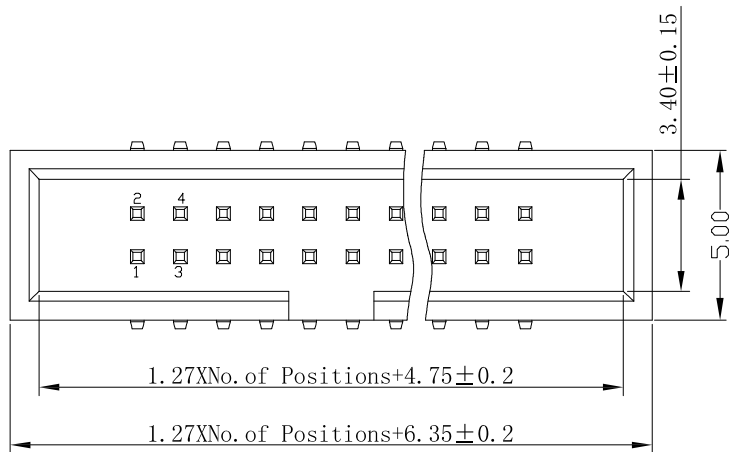


SPECIFICATION
 Current Rating: 1Amp
 Insulation Resistance: $1000M\Omega_{\min}$
 Contact Resistance: $20m\Omega_{\max}$
 Withstand Voltage: 500V AC/DC
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0
 Operating Temperature: -40°C to $+105^{\circ}\text{C}$


Ordering Code:

BHAM05 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$


- ① Series No:
- ② No. of Contacts: 10-100P
- ③ Contact Plating: G0: Gold flash, G1: 3u" Gold, G2: 5u" Gold, G3: 10u" Gold, G4: 15u" Gold, G5: 30u" Gold
- ④ Color Insulator: B:Black, U:Blue, W:White
- ⑤ Insulator Material: A:PA6T, B:LCP
- ⑥ Packing: A:Tray, T:Tube, U:Tube+CAP, R:Tape&Reel, W:Tape&Reel+CAP
- ⑦ Option: A:Type A, B:Type B

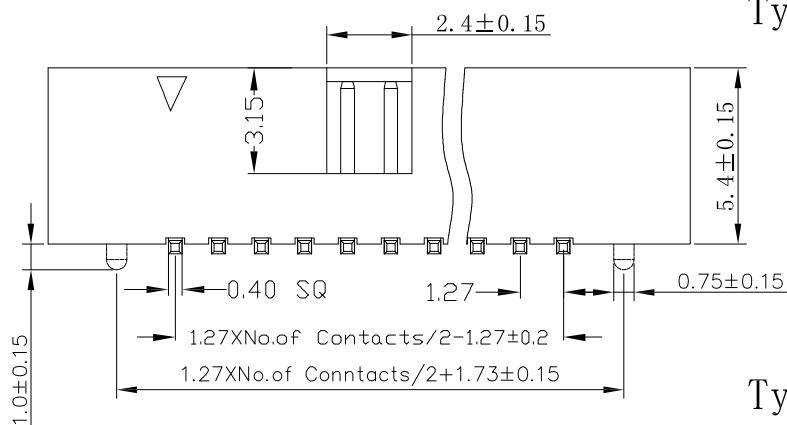

Type A



Type B



MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
 . X $\pm$.38,
 . XX $\pm$.25,
 . XXX $\pm$.15,
 ANG $\pm 2^{\circ}$

DSND	HUANG.J.M	DATE	2011-12-01	SCALE:	NAME:
CHKD				VIEW:	1.27mm Box Header SMT, H=5.4mm
APVD				UNIT: mm	Part No: BHAM05-XXXXXXX
Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203					Customer Part NO:(DWG NO.)