
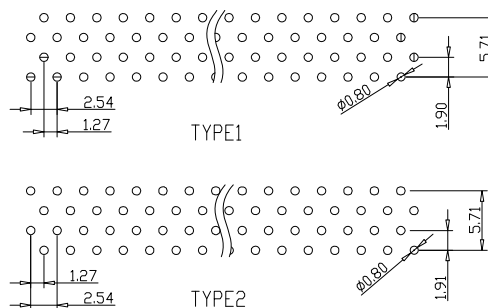




1
2
3
4
5
6
7
8
9
10
11
12
13
14
15

ROHS
COMPLIANT

1.27*2.54mm Box Header 180°H=10.5Four Row DIP

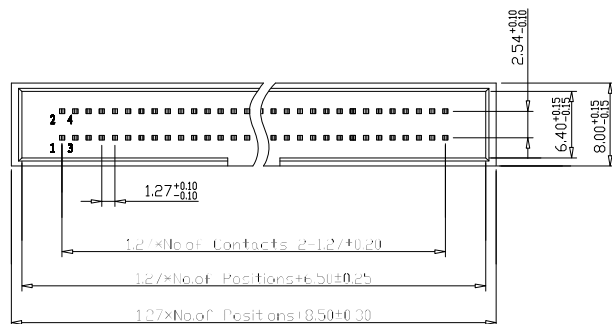

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

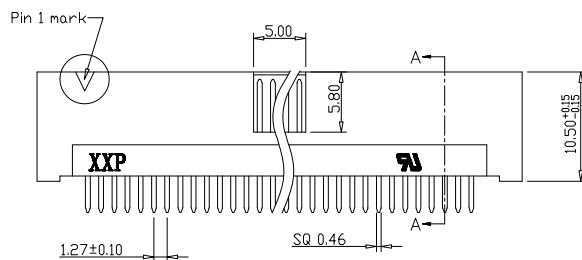

SECTION A-A

SPECIFICATION

Current Rating: 1.0Amp
Insulation Resistance: 1000mΩ min
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:
BHBS01 -X-X-X-X-X-X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
② No. of Contacts
06 08 10 14
16 20 26 30
34 40 50 60
80 100
③ Contact plating
G0:Gold flash
G1:3u"Gold
G2:5u"Gold
G3:10u"Gold
G4:15u"Gold
G5:30u"Gold
④ Color Insulator
B:Black
U:Blue
W:White
⑤ Insulator Material
A:PBT
B:PA6T
⑥ Packing
A:Tray
T:Tube
⑦ Series NO.
A:Type1
B:Type2

MARK	DESCRIPTION	DATE	REVISED	APPROVED
REVISIONS				

unless otherwise specified tolerance:
X±: 0.35
.X±: 0.25,
.XX±: 0.20,
.XXX±: 0.15,
ANG±2°

DSND	HUANGJM	DATE	2017-12-05	SCALE:	NAME: 1.27*2.54mm Box Header 180° H=10.5 Four Row DIP
CHKD				VIEW:	
APVD				UNIT: mm	Part No: BHBS01-XXXXXX
 Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203					Customer Part NO:(DWG NO.)