
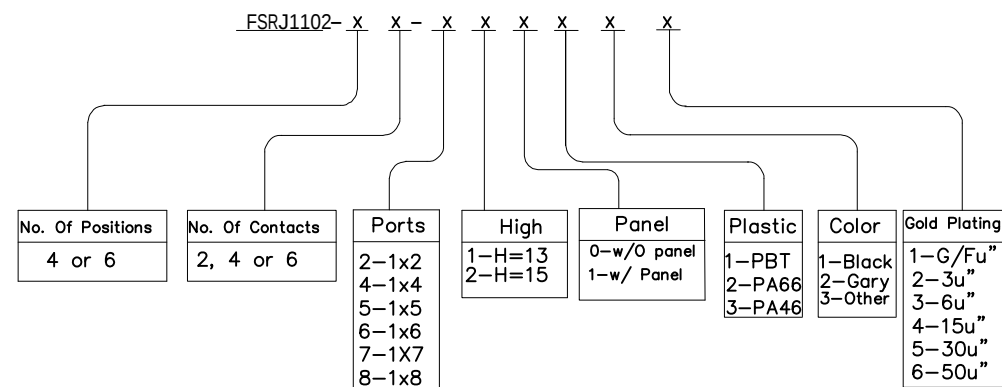
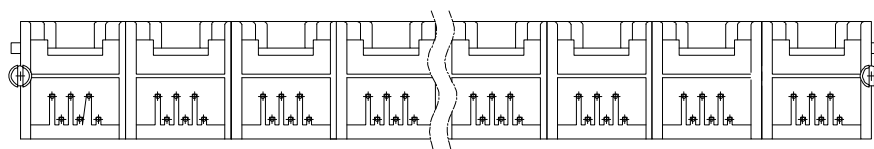


MATERIAL:

1. HOUSING MATERIAL :PBT,PA66,PA46(UL 94V-0)
2. CONTACT MATERIAL :ROUND PINS-0.46mm DIAMETER PHOSPHOR BRONZE;
GOLD PLATING OVER NICKEL

1. VOLTAGE RATING	:125 VAC RMS
2. CURRENT RATING	:1.5 AMP
3. CONTACT RESISTANCE	:30 MILLIOHMS MAX2
4. INSULATION RESISTANCE	:500 MEGOHMS MIN @500V DC
5. DIELECTRIC WITHSTANDING RISISTANCE	:1000V AC RMS 60Hz. 1MIN
6. DURABILITY	:750 CYCLES MIN
7. TEMPERATURE	:-40 °C/+85°C

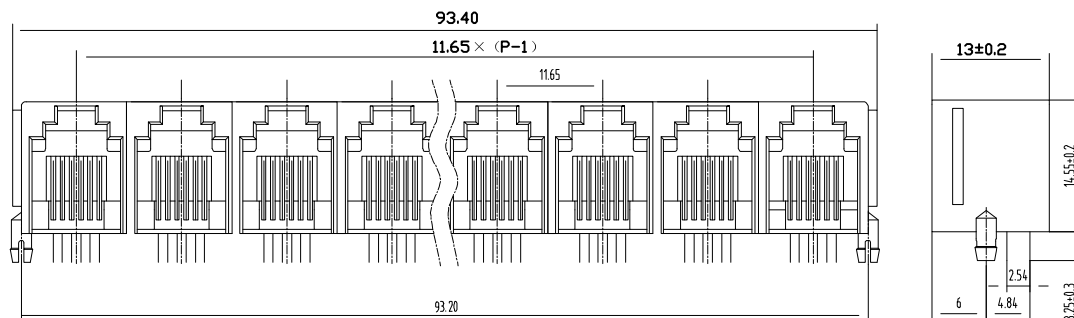

					unless otherwise specified tolerance:
					MM
					.00±0.25
MARK	DESCRIPTION		DATE	REVISED	APPROVED
	REVISIONS				.000±0.13
					.0000±0.05

DSND	HUANG.J.M	DATE	2018-1-18	SCALE:		NAME: RJ11 SIDE ENTRY PCB JACK
CHKD				VIEW:		
APVD				UNIT: mm		
 Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203					Part No: FSRJ1102-XXXXXXXXXX Customer Part NO:(DWG NO.)	