
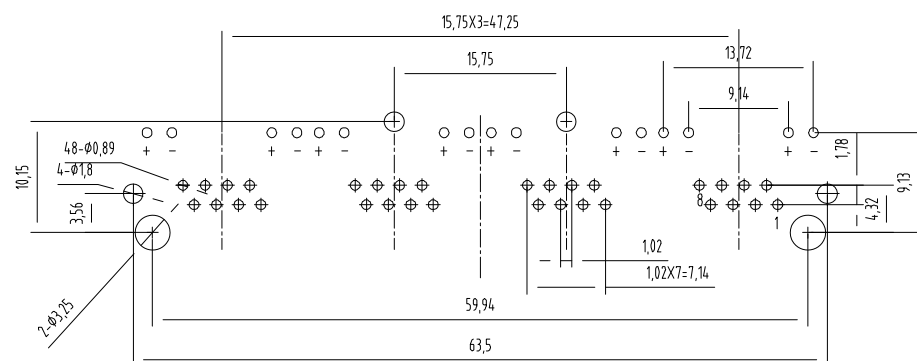




MATERIAL:

1. HOUSING MATERIAL	:PBT,PA66,PA46(UL 94V-0)
2. CONTACT MATERIAL	:ROUND PINS-0.46mm DIAMETER PHOSPHOR BRONZE; GOLD PLATING OVER NICKEL
3. SHIELD	:0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED
4. LED	:OPTION

1. VOLTAGE RATING	:125 VAC RMS
2. CURRENT RATING	:1.5 AMP
3. CONTACT RESISTANCE	:30 MILLIOHMS MAX2
4. INSULATION RESISTANCE	:500 MEGOHMS MIN @500V DC
5. DIELECTRIC WITHSTANDING RISISTANCE	:1000V AC RMS 60Hz. 1MIN
6. DURABILITY	:750 CYCLES MIN
7. TEMPERATURE	:-40°C/+85°C

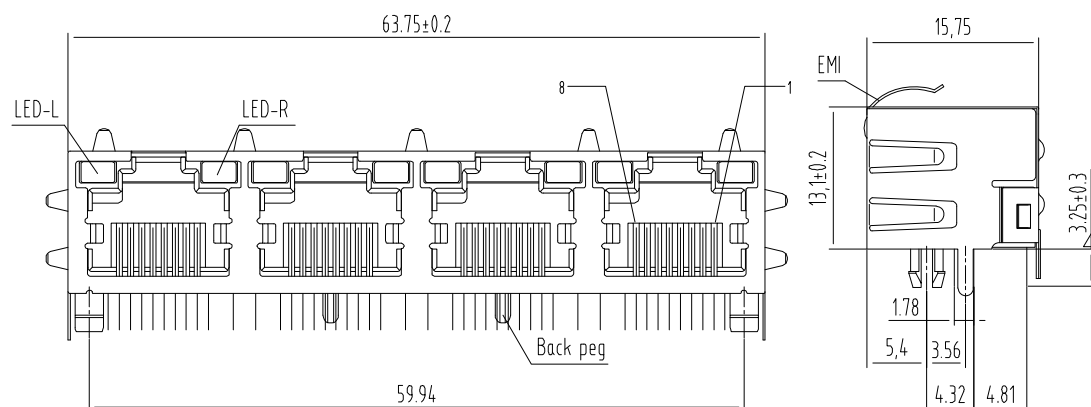

PC Board Layout
Component Side Shown

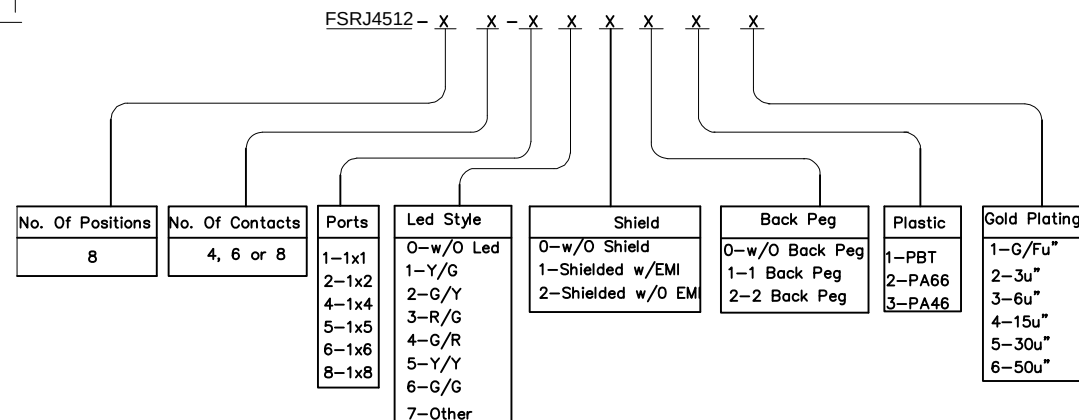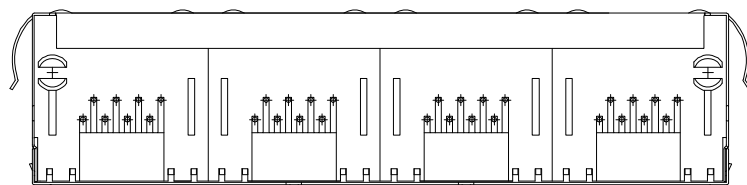

DSND	HUANG.J.M	DATE	2018-1-18	SCALE:		NAME: RJ45 LED SIDE ENTRY PCB JACK
CHKD				VIEW:		
APVD				UNIT: mm		
 Dongguan Fushu Electronic Technology Co.,Ltd Tel:0755-81765247/41 Fax:0769-81765203						Part No: FSRJ4512-XXXXXXXXX Customer Part NO:(DWG NO.)